



Catalogue

Open Type Blind Rivet	NORMAL	5050 Alu./Steel WK-1-ASK	2
		5052 Alu./Steel WK-2-ASK	3
		5056 Alu./Steel WK-5-ASK	4
		5056 Alu./Stainless Steel WK-ABK	5
		Alu./Alu. WK-AAK	6
		Steel/Steel WK-SSK.....	7
		Stainless Steel/Stainless Steel WK-BBK	8
		Stainless Steel/Steel WK-BSK	9
		Copper/Steel WK-CSK	10
		Copper/Stainless Steel WK-CBK.....	11
		CSK HEAD	5050 Alu./Steel WK-1-ASKC
	5052 Alu./Steel WK-2-ASKC		13
	5056 Alu./Steel WK-5-ASKC		14
	Alu./Alu. WK-AAKC		15
	Steel/Steel WK-SSKC.....		16
	Stainless Steel/Stainless Steel WK-BBKC		17
	Stainless Steel/Steel WK-BSKC		18
	LARGE HEAD	5050 Alu./Steel WK-1-ASKLF.....	19
		5052 Alu./Steel WK-2-ASKLF.....	20
		5056 Alu. or 5154 Alu./Steel WK-5-ASKLF	21
		Alu./Alu. WK-AAKLF	22
		Steel/Steel WK-SSKLF	23
		Stainless Steel/Stainless Steel WK-BBKLF	24
		Stainless Steel/Steel WK-BSKLF	25
	SPECIAL	Alu./Steel Multi-Grip Type WK-ASMG	26
		Alu./Steel Multi-Grip Type WK-ASMGC.....	27
		Alu./Stainless Steel Multi-Grip Type WK-ABMG	28
		Alu./Steel Peel Type WK-ASP	29

Closed Type Blind Rivet	NORMAL	5056 Alu./Steel WK-ASF.....	30
		Alu./Alu. WK-AAF	31
		Steel/Steel WK-SSF	32
		Stainless Steel/Stainless Steel WK-BBF-S	33
		Alu./Stainless Steel WK-ABF	34
		Copper/Steel WK-CSF	35
		Copper/Stainless Steel WK-CBF.....	36
	CSK HEAD	5056 Alu./Steel WK-ASFC	37
LARGE HEAD	5056 Alu./Steel WK-ASFLF	38	


Structural Rivet	KF-BOLT SERIES	WK-SS71	39
		WK-AA71	40
		WK-BB71	41
		WK-SSC71	42
		WK-SSN	43
		WK-AAN	44
		WK-BBN	45
		WK-SSNC.....	46
	HEM-FIX	WK-SS21	47
		WK-SS22	48
		WK-SS23	49
		WK-AA41	50
		WK-BB21	51
	UNIGRIP	WK-BBP61	52
		WK-SSP-01	53
	MULTIGRIP	WK-SS1624-Series	54
		MULTIGRIP WK-SS01-Series	55
		MULTIGRIP CSK WK-SS04	56
		MULTIGRIP W -BBS11-Series	57
	KF-BULB	WK-DL	58
	SQ, AQ, BQ	WK-SQ-Rivet SSQ-Series	59
		WK-AQ-Rivet ASQ-Series	60
		WK-BBQ	61
	Monel 400	WK-Monel 400/Stainless Steel Type Large Head	62
		WK-Monel 400	63

RIVET NUT	Flat Head WK-PT	64
	Flat Head WK-PTR	65
	Thin CSK Head WK-XCT	66
	Thin CSK Head WK-XCT-R	67
	CSK Head WK-CT	68
	CSK Head WK-CTR	69
	Thin Head Half Hex WK-XBL.....	70
	Flat Head Hex WK-PBL.....	71

RIVET GUN	WKF-2	72
	WKF-3	73
	WKF-4	74
	WK-1.....	75



5050 Alu./Steel WK-1-ASK

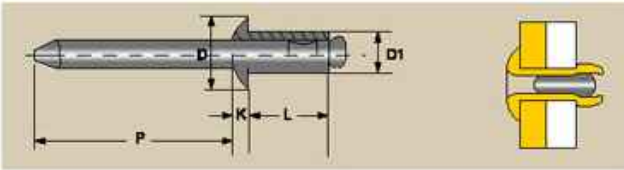

MATERIAL

BODY: 5050 Alu.Alloy

MANDREL: Steel

FINISH

BODY: Polished


MANDREL: Zinc Plated

D1 NOM.	DRILL NO. &HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
3/32" 2.44mm	#41 2.5-2.6	WK-1-ASK32	0.020-0.125	0.5-3.2	0.250	6.4	0.188" 4.8	0.032" 0.81	1.00" 25.4	70 310N	80 360N
		WK-1-ASK34	0.126-0.250	3.2-6.4	0.375	9.5					
		WK-1-ASK36	0.251-0.375	6.4-9.5	0.500	12.7					
1/8" 3.21mm	#30 3.3-3.4	WK-1-ASK41	0.020-0.062	0.5-1.6	0.212	5.4	0.250" 6.4	0.040" 1.02	1.06" 27	120 530N	150 670N
		WK-1-ASK42	0.063-0.125	1.6-3.2	0.275	7.0					
		WK-1-ASK43	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-1-ASK44	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-1-ASK45	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-1-ASK46	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-1-ASK48	0.376-0.500	9.5-12.7	0.650	16.5					
		WK-1-ASK410	0.501-0.625	12.7-15.9	0.775	19.7					
5/32" 4.0mm	#20 4.2-4.2	WK-1-ASK52	0.020-0.125	0.5-3.2	0.300	7.6	0.312" 7.9	0.050" 1.27	1.06" 27	190 850N	230 1020N
		WK-1-ASK53	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-1-ASK54	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-1-ASK56	0.252-0.375	6.4-9.5	0.550	14.0					
		WK-1-ASK58	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-1-ASK510	0.502-0.625	12.7-15.9	0.800	20.3					
		WK-1-ASK516	0.876-1.000	22.2-25.4	1.175	29.8					
3/16" 4.8mm	#11 4.9-5.0	WK-1-ASK62	0.020-0.125	0.5-3.2	0.325	8.3	0.375" 9.5	0.060" 1.52	1.06" 27	260 1160N	320 1430N
		WK-1-ASK63	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-1-ASK64	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-1-ASK66	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-1-ASK68	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-1-ASK610	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-1-ASK612	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-1-ASK614	0.751-0.875	19.2-22.2	1.075	27.3					
		WK-1-ASK616	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-1-ASK618	1.001-1.125	25.4-29.6	1.325	33.7					
		WK-1-ASK622	1.251-1.375	31.8-34.9	1.575	40.0					
1/4" 6.4mm	F 6.5-6.6	WK-1-ASK82	0.020-0.125	0.5-3.2	0.375	9.5	0.500" 12.7	0.080" 2.03	1.25" 32	460 2050N	560 2500N
		WK-1-ASK84	0.126-0.250	3.2-6.4	0.500	12.7					
		WK-1-ASK86	0.251-0.375	6.4-9.5	0.625	15.9					
		WK-1-ASK88	0.376-0.500	9.5-12.7	0.750	19.1					
		WK-1-ASK810	0.501-0.625	12.7-15.9	0.875	22.2					
		WK-1-ASK812	0.626-0.750	15.9-19.1	1.000	25.4					
		WK-1-ASK814	0.751-0.875	19.2-22.2	1.125	28.6					
		WK-1-ASK816	0.876-1.000	22.2-25.4	1.250	31.8					
		WK-1-ASK818	1.001-1.125	25.4-28.6	1.375	34.9					



Open Type Blind Rivet >> NORMAL >> 5052 Alu./Steel WK-2-ASK

5052 Alu./Steel WK-2-ASK

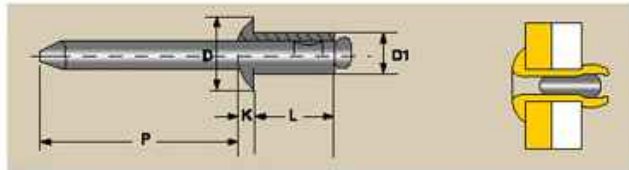

MATERIAL

BODY: 5052 Alu.Alloy

MANDREL: Steel

FINISH

BODY: Polished


MANDREL: Zinc Plated

D1 NOM.	DRILL NO. &HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
3/32" 2.4mm	#41 2.5-2.6	WK-2-ASK32	0.020-0.125	0.5-3.2	0.250	6.4	0.188" 4.8	0.032" 0.81	1.00" 25.4	70 310N	80 360N
		WK-2-ASK34	0.126-0.250	3.2-6.4	0.375	9.5					
		WK-2-ASK36	0.251-0.375	6.4-9.5	0.500	12.7					
1/8" 3.2mm	#30 3.3-3.4	WK-2-ASK41	0.020-0.062	0.5-1.6	0.212	5.4	0.250" 6.4	0.040" 1.02	1.06" 27	120 530N	150 670N
		WK-2-ASK42	0.063-0.125	1.6-3.2	0.275	7.0					
		WK-2-ASK43	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-2-ASK44	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-2-ASK45	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-2-ASK46	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-2-ASK48	0.376-0.500	9.5-12.7	0.650	16.5					
		WK-2-ASK410	0.502-0.625	12.7-15.9	0.755	19.7					
5/32" 4.0mm	#20 4.1-4.2	WK-2-ASK52	0.020-0.125	0.5-3.2	0.300	7.6	0.312" 7.9	0.050" 1.27	1.06" 27	190 850N	230 1020N
		WK-2-ASK53	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-2-ASK54	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-2-ASK56	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-2-ASK58	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-2-ASK510	0.501-0.625	12.7-15.9	0.800	20.3					
		WK-2-ASK516	0.876-1.000	22.2-25.4	1.175	29.8					
3/16" 4.8mm	#11 4.9-5.0	WK-2-ASK62	0.020-0.125	0.5-3.2	0.325	8.3	0.375" 9.5	0.060" 1.52	1.06" 27	260 1160N	320 1430N
		WK-2-ASK63	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-2-ASK64	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-2-ASK66	0.252-0.375	6.4-9.5	0.575	14.6					
		WK-2-ASK68	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-2-ASK610	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-2-ASK612	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-2-ASK614	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-2-ASK616	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-2-ASK618	1.001-1.125	25.4-28.6	1.325	33.7					
		WK-2-ASK622	1.251-1.375	31.8-34.9	1.575	40.0					
1/4" 6.4mm	F 6.5-6.6	WK-2-ASK82	0.020-0.125	0.5-3.2	0.375	9.5	0.500" 12.7	0.080" 2.03	1.25" 32	460 2050N	560 2500N
		WK-2-ASK84	0.126-0.250	3.2-6.4	0.500	12.7					
		WK-2-ASK86	0.251-0.375	6.4-9.5	0.625	15.9					
		WK-2-ASK88	0.376-0.500	9.5-12.7	0.750	19.1					
		WK-2-ASK810	0.501-0.625	12.7-15.9	0.875	22.2					
		WK-2-ASK812	0.626-0.750	15.9-19.1	1.000	25.4					
		WK-2-ASK814	0.751-0.875	19.1-22.2	1.125	28.6					
		WK-2-ASK816	0.876-1.000	22.2-25.4	1.250	31.8					
		WK-2-ASK818	1.001-1.125	25.4-28.6	1.375	34.9					



Open Type Blind Rivet >> NORMAL >> 5056 Alu./Steel WK-5-ASK

5056 Alu./Steel WK-5-ASK

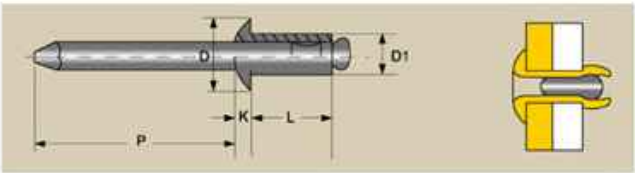

MATERIAL

BODY: 5056 Alu.Alloy

MANDREL: Steel

FINISH


BODY: Polished

MANDREL: Zinc Plated

D1 NOM.	DRILL NO. &HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
3/32" 2.4mm	#41 2.5-2.6	WK-5-ASK32	0.020-0.125	0.5-3.2	0.250	6.4	0.188" 4.8	0.032" 0.81	1.00" 25.4	90 400N	120 535N
		WK-5-ASK34	0.126-0.250	3.2-6.4	0.375	9.5					
		WK-5-ASK36	0.251-0.375	6.4-9.5	0.500	12.7					
1/8" 3.2mm	#30 3.3-3.4	WK-5-ASK41	0.020-0.062	0.5-1.6	0.212	5.4	0.250" 6.4	0.040" 1.02	1.06" 27	170 760N	220 980N
		WK-5-ASK42	0.063-0.125	1.6-3.2	0.275	7.0					
		WK-5-ASK43	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-5-ASK44	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-5-ASK45	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-5-ASK46	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-5-ASK48	0.376-0.500	9.5-12.7	0.650	16.5					
		WK-5-ASK410	0.501-0.625	12.7-15.9	0.755	19.7					
5/32" 4.0mm	#20 4.2-4.2	WK-5-ASK52	0.020-0.125	0.5-3.2	0.300	7.6	0.312" 7.9	0.050" 1.27	1.06" 27	260 1160N	350 1560N
		WK-5-ASK53	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-5-ASK54	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-5-ASK56	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-5-ASK58	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-5-ASK510	0.501-0.625	12.7-15.9	0.800	20.3					
		WK-5-ASK516	0.876-1.000	22.2-25.4	1.175	29.8					
3/16" 4.8mm	#11 4.9-5.0	WK-5-ASK62	0.020-0.125	0.5-3.2	0.325	8.3	0.375" 9.5	0.060" 1.52	1.06" 27	380 1700N	500 2230N
		WK-5-ASK63	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-5-ASK64	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-5-ASK66	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-5-ASK68	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-5-ASK610	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-5-ASK612	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-5-ASK614	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-5-ASK616	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-5-ASK618	1.001-1.125	25.4-29.6	1.325	33.7					
		WK-5-ASK622	1.251-1.375	31.8-34.9	1.575	40.0					
1/4" 6.4mm	F 6.5-6.6	WK-5-ASK82	0.020-0.125	0.							



5056 Alu./Stainless Steel WK-ABK

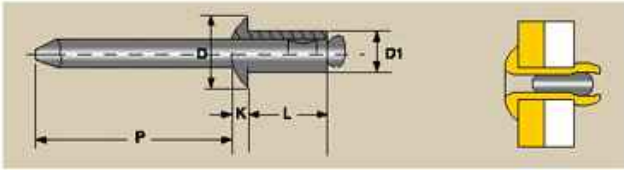

MATERIAL

BODY: 5056 Alu.Alloy

MANDREL: Stainless Steel

FINISH

BODY: Polished


MANDREL: Polished

D1 NOM.	DRILL NO. &HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2 mm	30 3.3-3.4	WK-ABK41	0.020-0.062	0.5-1.6	0.212	5.4	0.250" 6.4	0.040" 1.02	1.06" 27	170 760 N	220 980 N
		WK-ABK42	0.063-0.125	1.6-3.2	0.275	7.0					
		WK-ABK43	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-ABK44	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-ABK45	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-ABK46	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-ABK48	0.376-0.500	9.5-12.7	0.650	16.5					
		WK-ABK410	0.501-0.625	12.7-15.9	0.775	19.7					
5/32" 4.0 mm	20 4.1-4.2	WK-ABK52	0.020-0.125	0.5-3.2	0.300	7.6	0.312" 7.9	0.050" 1.27	1.06" 27	260 1160 N	350 1560 N
		WK-ABK53	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-ABK54	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-ABK56	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-ABK58	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-ABK510	0.501-0.625	12.7-15.9	0.800	20.3					
3/16" 4.8 mm	11 4.9-5.0	WK-ABK62	0.020-0.125	0.5-3.2	0.325	8.3	0.375" 9.5	0.060" 1.52	1.06" 27	380 1700 N	500 2230 N
		WK-ABK63	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-ABK64	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-ABK66	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-ABK68	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-ABK610	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-ABK612	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-ABK614	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-ABK616	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-ABK618	1.001-1.125	25.4-28.6	1.325	33.7					
1/4" 6.4mm	F 6.5-6.6	WK-ABK82	0.020-0.125	0.5-3.2	0.375	9.5	0.500" 12.7	0.080" 2.03	1.25" 32	700 3120N	920 4100N
		WK-ABK84	0.126-0.250	3.2-6.4	0.500	12.7					
		WK-ABK86	0.251-0.375	6.4-9.5	0.625	15.9					
		WK-ABK88	0.376-0.500	9.5-12.7	0.750	19.1					
		WK-ABK810	0.501-0.625	12.7-15.9	0.875	22.2					
		WK-ABK812	0.626-0.750	15.9-19.1	1.000	25.4					
		WK-ABK814									



Open Type Blind Rivet >> NORMAL >> Alu./Alu. WK-AAK

Alu./Alu. WK-AAK

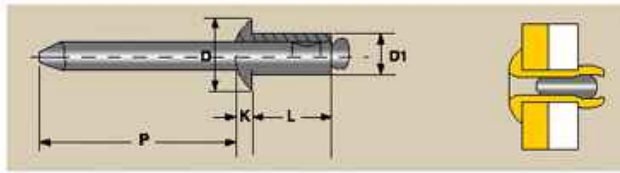

MATERIAL

BODY: 5052 Alu.Alloy

MANDREL: Alu.Alloy

FINISH


BODY: Polished

MANDREL: Polished

D1 NOM.	DRILL NO. &HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
3/32" 2.4mm	#41 2.5-2.6	WK-AAK32	0.020-0.125	0.5-3.2	0.250	6.4	0.188" 4.8	0.032" 0.81	1.00" 25.4	70 310N	80 360 N
		WK-AAK34	0.126-0.250	3.2-6.4	0.375	9.5					
		WK-AAK36	0.251-0.375	6.4-9.5	0.500	12.7					
1/8" 3.2mm	#30 3.3-3.4	WK-AAK41	0.020-0.062	0.5-1.6	0.212	5.4	0.250" 6.4	0.040" 1.02	1.06" 27	120 530 N	150 670 N
		WK-AAK42	0.063-0.125	1.6-3.2	0.275	7.0					
		WK-AAK43	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-AAK44	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-AAK45	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-AAK46	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-AAK48	0.376-0.500	9.5-12.7	0.650	16.5					
5/32" 4.0mm	#20 4.1-4.2	WK-AAK52	0.020-0.125	0.5-3.2	0.300	7.6	0.312" 7.9	0.050" 1.27	1.06" 27	190 850 N	230 1020 N
		WK-AAK53	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-AAK54	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-AAK56	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-AAK58	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-AAK510	0.501-0.625	12.7-15.9	0.800	20.3					
		WK-AAK516	0.876-1.000	22.2-25.4	1.175	29.8					
3/16" 4.8mm	#11 4.9-5.0	WK-AAK62	0.020-0.125	0.5-3.2	0.325	8.3	0.375" 9.5	0.060" 1.52	1.06" 27	260 1160 N	320 1430 N
		WK-AAK63	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-AAK64	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-AAK66	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-AAK68	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-AAK610	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-AAK612	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-AAK614	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-AAK616	0.875-1.000	22.2-25.4	1.200	30.5					
		WK-AAK618	1.001-1.125	25.4-28.6	1.325	33.7					
		WK-AAK620	1.126-1.250	28.6-31.8	1.450	36.8					
1/4" 6.4mm	F 6.5-6.6	WK-AAK82	0.020-0.125	0.5-3.2	0.375	9.5	0.500" 12.7	0.080" 2.03	1.25" 32	460 2050 N	560 2500 N
		WK-AAK84	0.126-0.250	3.2-6.4	0.500	12.7					
		WK-AAK86	0.251-0.375	6.4-9.5	0.625	15.9					
		WK-AAK88	0.376-0.500	9.5-12.7	0.750	19.1					
		WK-AAK810	0.501-0.625	12.7-15.9	0.875	22.2					
		WK-AAK812	0.626-0.750	15.9-19.1	1.000	25.4					
		WK-AAK814	0.751-0.875	19.1-22.2	1.125	28.6					
		WK-AAK816	0.876-1.000	22.2-25.4	1.250	31.8					
		WK-AAK818	1.001-1.125	25.4-28.6	1.375	34.9					



Steel/Steel WK-SSK

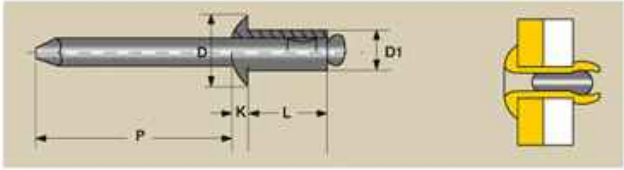

MATERIAL

BODY: Steel

MANDREL: Steel

FINISH


BODY: Zinc Plated

MANDREL: Zinc Plated

D1 NOM.	DRILL NO. &HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
3/32" 2.4mm											



Stainless Steel/Stainless Steel WK-BBK

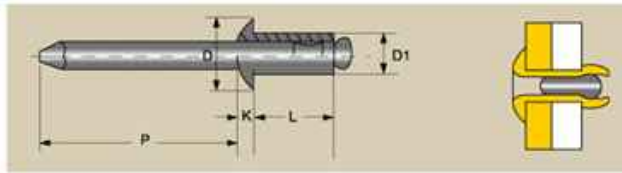

MATERIAL

BODY: Stainless Steel

MANDREL: Stainless Steel

FINISH

BODY: Polished


MANDREL: Polished

D1 NOM.	DRILL NO. HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3										



Open Type Blind Rivet >> NORMAL >> Stainless Steel/Steel WK-BSK

不锈钢/钢开口型WP-BSK

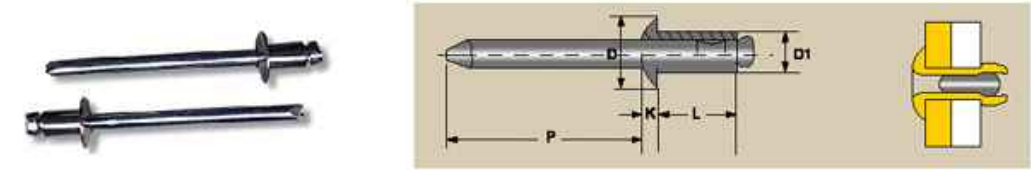

MATERIAL

BODY: Stainless Steel

MANDREL: Steel

FINISH

BODY: Polished

MANDREL: Zinc Plated

D1 NOM.	DRILL NO. \$HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-BSK41	0.020-0.062	0.5-1.6	0.212	5.4	0.250" 6.4	0.040" 1.02	1.06" 27	420 1870N	530 2360N
		WK-BSK42	0.063-0.125	1.6-3.2	0.275	7.0					
		WK-BSK43	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-BSK44	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-BSK45	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-BSK46	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-BSK48	0.376-0.500	9.5-12.7	0.650	16.5					
5/32" 4.0mm	#20 4.1-4.2	WK-BSK52	0.020-0.125	0.5-3.2	0.300	7.6	0.312" 7.9	0.050" 1.27	1.06" 27	650 2900N	820 3650N
		WK-BSK53	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-BSK54	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-BSK56	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-BSK58	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-BSK510	0.501-0.625	12.7-15.9	0.800	20.3					
		WK-BSK512	0.626-0.750	15.9-19.1	0.925	23.5					
		WK-BSK514	0.751-0.875	19.1-22.2	1.050	26.7					
3/16" 4.8mm	#11 4.9-5.0	WK-BSK62	0.020-0.125	0.5-3.2	0.325	8.3	0.375" 9.5	0.060" 1.52	1.06" 27	950 4230N	1200 5340N
		WK-BSK63	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-BSK64	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-BSK66	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-BSK68	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-BSK610	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-BSK612	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-BSK614	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-BSK616	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-BSK618	1.001-1.125	25.4-28.6	1.325	33.7					
		WK-BSK620	1.126-1.250	28.6-31.8	1.450	36.8					
		WK-BSK622	1.251-1.375	31.8-34.9	1.575	40.0					
1/4" 6.4mm	F 6.5-6.6	WK-BSK82	0.020-0.125	0.5-3.2	0.375	9.5	0.500" 12.7	0.080" 2.03	1.25" 32	1700 7570N	2100 9350N
		WK-BSK84	0.126-0.250	3.2-6.4	0.500	12.7					
		WK-BSK86	0.251-0.375	6.4-9.5	0.625	15.9					
		WK-BSK88	0.376-0.500	9.5-12.7	0.750	19.1					
		WK-BSK810	0.501-0.625	12.7-15.9	0.875	22.2					
		WK-BSK812	0.626-0.750	15.9-19.1	1.000	25.4					
		WK-BSK814	0.751-0.875	19.1-22.2	1.125	28.6					
		WK-BSK816	0.876-1.000	22.2-25.4	1.250	31.8					
		WK-BSK818	1.001-1.125	25.4-28.6	1.375	34.9					
		WK-BSK820	1.126-1.250	28.6-31.8	1.500	38.1					



Open Type Blind Rivet >> NORMAL >> Copper/Steel WK-CSK

Copper/Steel WK-CSK



MATERIAL

BODY: Copper

MANDREL: Steel

FINISH

BODY: Polished


MANDREL: Zinc Plated

D1 NOM.	DRILL NO. HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-CSK41	0.020-0.062	0.5-1.6	0.212	5.4	0.250" 6.4	0.040" 1.02	1.06" 27	157 700N	180 800N
		WK-CSK42	0.063-0.125	1.6-3.2	0.275	7.0					
		WK-CSK43	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-CSK44	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-CSK45	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-CSK46	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-CSK48	0.376-0.500	9.5-12.7	0.650	16.5					
5/32" 4.0mm	#20 4.1-4.2	WK-CSK52	0.020-0.125	0.5-3.2	0.300	7.6	0.312" 7.9	0.050" 1.27	1.06" 27	225 1000N	337 1500N
		WK-CSK53	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-CSK54	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-CSK56	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-CSK58	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-CSK510	0.501-0.625	12.7-15.9	0.800	20.3					
3/16" 4.8mm	#11 4.9-5.0	WK-CSK62	0.020-0.125	0.5-3.2	0.325	8.3	0.375" 9.5	0.060" 1.52	1.06" 27	337 1500N	450 2000N
		WK-CSK63	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-CSK64	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-CSK66	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-CSK68	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-CSK610	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-CSK612	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-CSK614	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-CSK616	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-CSK618	1.001-1.125	25.4-28.6	1.325	33.7					



Open Type Blind Rivet >> NORMAL >> Copper/Stainless Steel WK-CBK

Copper/Stainless Steel WK-CBK

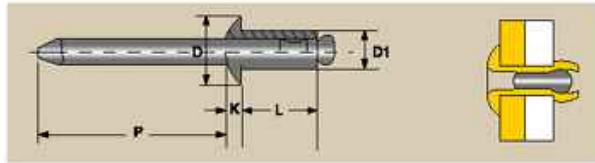

MATERIAL

BODY: Copper

MANDREL: Stainless Steel

FINISH

BODY: Polished


MANDREL: Polished

D1 NOM.	DRILL NO. HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-CBK41	0.020-0.062	0.5-1.6	0.212	5.4	0.250" 6.4	0.040" 1.02	1.06" 27	157 700N	180 800N
		WK-CBK42	0.063-0.125	1.6-3.2	0.275	7.0					
		WK-CBK43	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-CBK44	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-CBK45	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-CBK46	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-CBK48	0.376-0.500	9.5-12.7	0.650	16.5					
5/32" 4.0mm	#20 4.1-4.2	WK-CBK52	0.020-0.125	0.5-3.2	0.300	7.6	0.312" 7.9	0.050" 1.27	1.06" 27	225 1000N	337 1500N
		WK-CBK53	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-CBK54	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-CBK56	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-CBK58	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-CBK510	0.501-0.625	12.7-15.9	0.800	20.3					
3/16" 4.8mm	#11 4.9-5.0	WK-CBK62	0.020-0.125	0.5-3.2	0.325	8.3	0.375" 9.5	0.060" 1.52	1.06" 27	337 1500N	450 2000N
		WK-CBK63	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-CBK64	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-CBK66	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-CBK68	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-CBK610	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-CBK612	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-CBK614	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-CBK616	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-CBK618	1.001-1.125	25.4-28.6	1.325	33.7					



Open Type Blind Rivet >> CSK HEAD >> 5050 Alu./Steel WK-1-ASKC

5050 Alu./Steel WK-1-ASKC

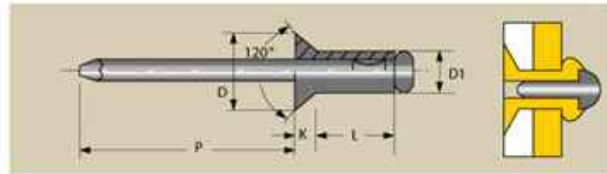

MATERIAL

BODY: 5050 Alu.Alloy

MANDREL: Steel

FINISH


BODY: Polished

MANDREL: Zinc Plated

D1 NOM.	DRILL NO. &HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
3/32" 2.4mm	#41 2.5-2.6	WK-1-ASK32C	0.079-0.125	2.0-3.2	0.250	6.4	0.174" 4.4	0.027" 0.69	1.00" 25.4	70 310N	80 360N
		WK-1-ASK34C	0.126-0.250	3.2-6.4	0.375	9.5					
		WK-1-ASK36C	0.251-0.375	6.4-9.5	0.500	12.7					
1/8" 3.2mm	#30 3.3-3.4	WK-1-ASK42C	0.092-0.125	2.3-3.2	0.275	7.0	0.220" 5.6	0.031" 0.79	1.06" 27	120 530N	150 670N
		WK-1-ASK43C	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-1-ASK44C	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-1-ASK45C	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-1-ASK46C	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-1-ASK48C	0.376-0.500	9.5-12.7	0.650	16.5					
5/32" 4.0mm	#20 4.1-4.2	WK-1-ASK53C	0.120-0.187	3.0-4.8	0.362	9.2	0.281" 7.1	0.040" 1.02	1.06" 27	190 850N	230 1020N
		WK-1-ASK54C	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-1-ASK56C	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-1-ASK58C	0.376-0.500	9.5-12.7	0.675	17.1					
3/16" 4.8mm	#11 4.9-5.0	WK-1-ASK63C	0.151-0.187	3.8-4.8	0.387	9.8	0.348" 8.8	0.050" 1.27	1.06" 27	260 1160N	320 1430N
		WK-1-ASK64C	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-1-ASK66C	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-1-ASK68C	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-1-ASK610C	0.501-0.625	12.7-15.9	0.825	21.0					
1/4" 6.4mm	F 6.5-6.6	WK-1-ASK84C	0.125-0.250	3.2-6.4	0.500	12.7	0.470" 11.9	0.060" 1.52	1.25" 32	460 2050N	560 2500N
		WK-1-ASK86C	0.251-0.375	6.4-9.5	0.625	15.9					
		WK-1-ASK88C	0.376-0.500	9.5-12.7	0.750	19.1					



5052 Alu./Steel WK-2-ASKC

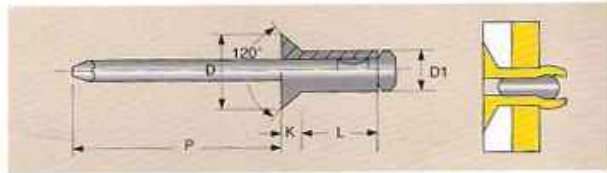

MATERIAL

BODY: 5052 Alu.Alloy

MANDREL: Steel

FINISH

BODY: Polished

MANDREL: Zinc Plated

D1 NOM.	DRILL NO. &HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
3/32" 2.4mm	#41 2.5-2.6	WK-2-ASK32C	0.079-0.125	2.0-3.2	0.250	6.4	0.174" 4.4	0.027" 0.69	1.00" 25.4	70 310N	80 360N
		WK-2-ASK34C	0.126-0.250	3.2-6.4	0.375	9.5					
		WK-2-ASK36C	0.251-0.375	6.4-9.5	0.500	12.7					
1/8" 3.2mm	#30 3.3-3.4	WK-2-ASK42C	0.092-0.125	2.3-3.2	0.275	7.0	0.220" 5.6	0.031" 0.79	1.06" 27	120 530N	150 670N
		WK-2-ASK43C	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-2-ASK44C	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-2-ASK45C	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-2-ASK46C	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-2-ASK48C	0.313-0.500	9.5-12.7	0.650	16.5					
5/32" 4.0mm	#20 4.1-4.2	WK-2-ASK53C	0.120-0.187	3.0-4.8	0.362	9.2	0.281" 7.1	0.040" 1.02	1.06" 27	190 850N	230 1020N
		WK-2-ASK54C	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-2-ASK56C	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-2-ASK58C	0.376-0.500	9.5-12.7	0.675	17.1					
3/16" 4.8mm	#11 4.9-5.0	WK-2-ASK63C	0.151-0.187	3.8-4.8	0.387	9.8	0.348" 8.8	0.050" 1.27	1.06" 27	260 1160N	320 1430N
		WK-2-ASK64C	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-2-ASK66C	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-2-ASK68C	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-2-ASK610C	0.501-0.625	12.7-15.9	0.825	21.0					
1/4" 6.4mm	F 6.5-6.6	WK-2-ASK84C	0.125-0.250	3.2-6.4	0.500	12.7	0.470" 11.9	0.060" 1.52	1.25" 32	460 2050N	560 2500N
		WK-2-ASK86C	0.251-0.375	6.4-9.5	0.625	15.9					
		WK-2-ASK88C	0.376-0.500	9.5-12.7	0.750	19.1					



Open Type Blind Rivet >> CSK HEAD >> 5056 Alu./Steel WK-5-ASKC


5056 Alu./Steel WK-5-ASKC



MATERIAL

BODY: 5056 Alu./Alloy

MANDREL: Steel

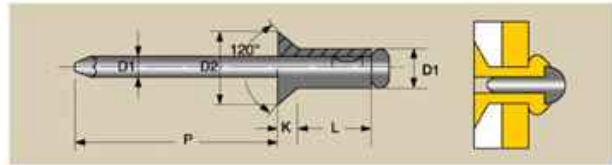

FINISH

BODY: Polished

MANDREL: Zinc Plated

D1 NOM.	DRILL NO. & HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
3/32" 2.4mm	#41 2.5-2.6	WK-5-ASK32 C	0.079-0.125	2.0-3.2	0.250	6.4	0.174" 4.4	0.027" 0.69	1.00" 25.4	90 400N	120 535N
		WK-5-ASK34 C	0.126-0.250	3.2-6.4	0.375	9.5					
		WK-5-ASK36 C	0.251-0.375	6.4-9.5	0.500	12.7					
1/8" 3.2mm	#30 3.3-3.4	WK-5-ASK42 C	0.092-0.125	2.3-3.2	0.275	7.0	0.220" 5.6	0.031" 0.79	1.06" 27	170 760N	220 980N
		WK-5-ASK43 C	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-5-ASK44 C	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-5-ASK45 C	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-5-ASK46 C	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-5-ASK48 C	0.376-0.500	9.5-12.7	0.650	16.5					
5/32" 4.0mm	#20 4.1-4.2	WK-5-ASK53 C	0.120-0.187	3.0-4.8	0.362	9.2	0.281" 7.1	0.040" 1.02	1.06" 27	260 1160N	350 1560N
		WK-5-ASK54 C	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-5-ASK56 C	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-5-ASK58 C	0.376-0.500	9.5-12.7	0.675	17.1					
3/16" 4.8mm	#11 4.9-5.0	WK-5-ASK63 C	0.151-0.187	3.8-4.8	0.387	9.8	0.348" 8.8	0.050" 1.27	1.06" 27	380 1700N	500 2230N
		WK-5-ASK64 C	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-5-ASK66 C	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-5-ASK68 C	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-5-ASK610 C	0.501-0.625	12.7-15.9	0.825	21.0					
1/4" 6.4mm	F 6.5-6.6	WK-5-ASK84 C	0.125-0.250	3.2-6.4	0.500	12.7	0.470" 11.9	0.060" 1.52	1.25" 32	700 3120N	920 4100N
		WK-5-ASK86 C	0.251-0.375	6.4-9.5	0.625	15.9					
		WK-5-ASK88 C	0.376-0.500	9.5-12.7	0.750	19.1					



Open Type Blind Rivet >> CSK HEAD >> Alu./Alu. WK-AAKC


Alu./Alu. WK-AAKC



MATERIAL

BODY: 5052 Alu.Alloy

MANDREL: Alu.Alloy

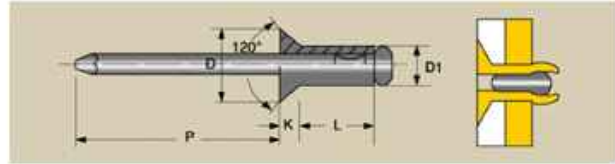

FINISH

BODY: Polished


MANDREL: Polished

D1 NOM.	DRILL NO. &HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
3/32" 2.44mm	#41 2.5-2.6	WK-AAK32 C	0.079-0.125	2.0-3.2	0.250	6.4	0.174" 4.4	0.027" 0.69	1.00" 25.4	70 310N	80 360N
		WK-AAK34 C	0.126-0.250	3.2-6.4	0.375	9.5					
		WK-AAK36 C	0.251-0.375	6.4-9.5	0.500	12.7					
1/8" 3.2mm	#30 3.3-3.4	WK-AAK42 C	0.092-0.125	2.3-3.2	0.275	7.0	0.220" 5.6	0.031" 0.79	1.06" 27	120 530N	150 670N
		WK-AAK43 C	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-AAK44 C	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-AAK45 C	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-AAK46 C	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-AAK48 C	0.376-0.500	9.5-12.7	0.650	16.5					
5/32" 4.0mm	#20 4.1-4.2	WK-AAK53 C	0.120-0.187	3.0-4.8	0.362	9.2	0.281" 7.1	0.040" 1.02	1.06" 27	190 850N	230 1020N
		WK-AAK54 C	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-AAK56 C	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-AAK58 C	0.376-0.500	9.5-12.7	0.675	17.1					
3/16" 4.8mm	#11 4.9-5.0	WK-AAK63 C	0.151-0.187	3.8-4.8	0.387	9.8	0.348" 8.8	0.050" 1.27	1.06" 27	260 1160N	320 1430N
		WK-AAK64 C	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-AAK66 C	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-AAK68 C	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-AAK610 C	0.501-0.625	12.7-15.9	0.825	21.0					
1/4" 6.4mm	F 6.5-6.6	WK-AAK84 C	0.125-0.250	3.2-6.4	0.500	12.7	0.470" 11.9	0.060" 1.52	1.25" 32	460 2050N	560 2500N
		WK-AAK86 C	0.251-0.375	6.4-9.5	0.625	15.9					
		WK-AAK88 C	0.376-0.500	9.5-12.7	0.750	19.1					



Open Type Blind Rivet >> CSK HEAD >> Steel/Steel WK-SSKC

Steel/Steel WK-SSKC

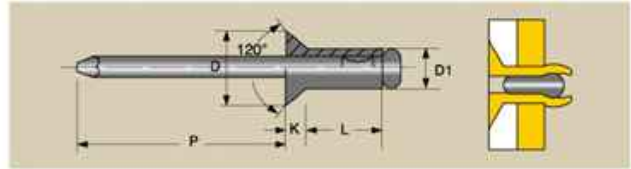

MATERIAL

BODY: Steel

MANDREL: Steel

FINISH


BODY: Zinc Plated

MANDREL: Zinc Plated

D1 NOM.	DRILL NO. &HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-SSK42 C	0.092-0.125	2.3-3.2	0.275	7.0	0.220" 5.6	0.031" 0.79	1.06" 27	260 1160N	310 1380N
		WK-SSK43 C	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-SSK44 C	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-SSK45 C	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-SSK46 C	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-SSK48 C	0.376-0.500	9.5-12.7	0.650	16.5					
5/32" 4.0mm	#20 4.1-4.2	WK-SSK52 C	0.020-0.125	0.5-3.2	0.300	7.6	0.281" 7.1	0.040" 1.02	1.06" 27	370 1650N	470 2100N
		WK-SSK53 C	0.120-0.187	3.0-4.8	0.362	9.2					
		WK-SSK54 C	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-SSK56 C	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-SS 58C	0.376-0.500	9.5-12.7	0.675	17.1					
3/16" 4.8mm	#11 4.9-5.0	WK-SSK63 C	0.151-0.187	3.8-4.8	0.387	9.8	0.348" 8.8	0.050" 1.27	1.06" 27	540 2400N	680 3030N
		WK-SSK64 C	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-SSK66 C	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-SSK68 C	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-SSK610 C	0.501-0.625	12.7-15.9	0.825	21.0					
1/4" 6.4mm	F 6.5-6.6	WK-SSK84 C	0.125-0.250	3.2-6.4	0.500	12.7	0.470" 11.9	0.060" 1.52	1.25" 32	1000 4450N	1240 5520N
		WK-SSK86 C	0.251-0.375	6.4-9.5	0.625	15.9					
		WK-SSK88 C	0.376-0.500	9.5-12.7	0.750	19.1					



Stainless Steel WK-BBK

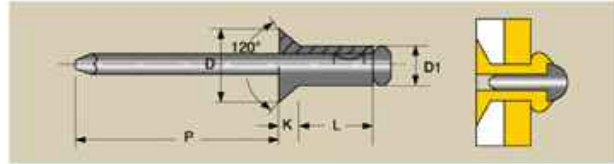

MATERIAL

BODY: Stainless Steel

MANDREL: Stainless Steel

FINISH

BODY: Polished

MANDREL: Polished

D1 NOM.	DRILL NO. & HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K REF.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-BBK42C	0.092-0.125	2.3-3.2	0.275	7.0	0.220" 5.6	0.031" 0.79	1.06" 27	420 1870N	530 2360N
		WK-BBK43C	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-BBK44C	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-BBK45C	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-BBK46C	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-BBK48C	0.376-0.500	9.5-12.7	0.650	16.5					
5/32" 4.0mm	#20 4.1-4.2	WK-BBK53C	0.120-0.187	3.0-4.8	0.362	9.2	0.281" 7.1	0.040" 1.02	1.06" 27	650 2900N	820 3650N
		WK-BBK54C	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-BBK56C	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-BBK58C	0.376-0.500	9.5-12.7	0.675	17.1					
3/16" 4.8mm	#11 4.9-5.0	WK-BBK63C	0.151-0.187	3.8-4.8	0.387	9.8	0.348" 8.8	0.050" 1.27	1.06" 27	950 4230N	1200 5340N
		WK-BBK64C	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-BBK66C	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-BBK68C	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-BBK610C	0.501-0.625	12.7-15.9	0.825	21.0					



Open Type Blind Rivet >> CSK HEAD >> Stainless Steel/Steel WK-BSKC


Stainless Steel/Steel WK-BSKC



MATERIAL

BODY: Stainless Steel

MANDREL: Steel

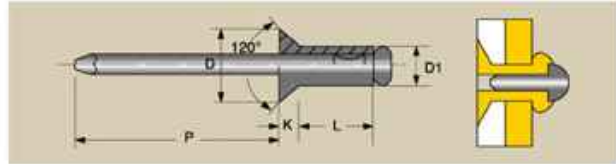

FINISH

BODY: Polished

MANDREL: Zinc Plated

D1 NOM.	DRILL NO. &HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K REF.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-BSK42C	0.092-0.125	2.3-3.2	0.275	7.0	0.220" 5.6	0.031" 0.79	1.06" 27	420 1870N	530 2360N
		WK-BSK43C	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-BSK44C	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-BSK45C	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-BSK46C	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-BSK48C	0.376-0.500	9.5-12.7	0.650	16.5					
5/32" 4.0mm	#20 4.1-4.2	WK-BSK53C	0.120-0.187	3.0-4.8	0.362	9.2	0.281" 7.1	0.040" 1.02	1.06" 27	650 2900N	820 3650N
		WK-BSK54C	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-BSK56C	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-BSK58C	0.376-0.500	9.5-12.7	0.675	17.1					
3/16" 4.8mm	#11 4.9-5.0	WK-BSK62C	0.151-0.187	3.8-4.8	0.387	9.8	0.348" 8.8	0.050" 1.27	1.06" 27	950 4230N	1200 5340N
		WK-BSK64C	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-BSK66C	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-BSK68C	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-BSK610C	0.501-0.625	12.7-15.9	0.825	21.0					



Open Type Blind Rivet >> LARGE HEAD >> 5050 Alu./Steel WK-1-ASKLF


5050 Alu./Steel WK-1-ASKLF



MATERIAL

BODY: 5050 Alu.Alloy

MANDREL: Steel

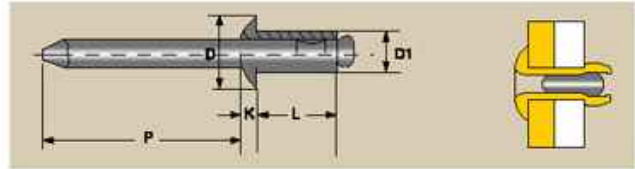

FINISH

BODY: Polished


MANDREL: Zinc Plated

D1 NOM.	DRILL NO. & HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-1-ASK42LF	0.063-0.125	1.6-3.2	0.275	7.0	0.375" 9.5	0.065" 1.65	1.06" 27	120 530N	150 670N
		WK-1-ASK43LF	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-1-ASK44LF	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-1-ASK45LF	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-1-ASK46LF	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-1-ASK48LF	0.376-0.500	9.5-12.7	0.650	16.5					
		WK-1-ASK410LF	0.501-0.625	12.7-15.9	0.775	19.7					
5/32" 4.0mm	#20 4.1-4.2	WK-1-ASK52LF	0.020-0.125	0.5-3.2	0.300	7.6	0.468" 12.0	0.075" 1.90	1.06" 27	190 850N	230 1020N
		WK-1-ASK53LF	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-1-ASK54LF	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-1-ASK56LF	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-1-ASK58LF	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-1-ASK510LF	0.501-0.625	12.7-15.9	0.800	20.3					
3/16" 4.8mm	#11 4.9-5.0	WK-1-ASK62LF	0.020-0.125	0.5-3.2	0.325	8.3	0.625" 16.0	0.092" 2.33	1.06" 27	260 1160N	320 1430N
		WK-1-ASK63LF	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-1-ASK64LF	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-1-ASK66LF	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-1-ASK68LF	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-1-ASK610LF	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-1-ASK612LF	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-1-ASK614LF	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-1-ASK616LF	0.876-1.000	22.5-25.4	1.200	30.5					
		WK-1-ASK618LF	1.001-1.125	25.4-28.6	1.325	33.7					



Open Type Blind Rivet >> LARGE HEAD >> 5052 Alu./Steel WK-2-ASKLF

5052 Alu./Steel WK-2-ASKLF

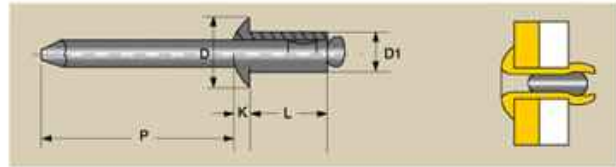

MATERIAL

BODY: 5052 Alu.Alloy

MANDREL: Steel

FINISH

BODY: Polished


MANDREL: Zinc Plated

D1 NOM.	DRILL NO. &HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-2-ASK42LF	0.063-0.125	1.6-3.2	0.275	7.0	0.375" 9.5	0.085" 1.65	1.06" 27	120 530N	150 670N
		WK-2-ASK43LF	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-2-ASK44LF	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-2-ASK45LF	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-2-ASK46LF	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-2-ASK48LF	0.376-0.500	9.5-12.7	0.650	16.5					
		WK-2-ASK410LF	0.501-0.625	12.7-15.9	0.775	19.7					
5/32" 4.0mm	#20 4.1-4.2	WK-2-ASK52LF	0.020-0.125	0.5-3.2	0.300	7.6	0.468" 12.0	0.075" 1.90	1.06" 27	190 850N	230 1020N
		WK-2-ASK53LF	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-2-ASK54LF	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-2-ASK56LF	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-2-ASK58LF	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-2-ASK510LF	0.501-0.625	12.7-15.9	0.800	20.3					
3/16" 4.8mm	#11 4.9-5.0	WK-2-ASK62LF	0.020-0.125	0.5-3.2	0.325	8.3	0.625" 16.0	0.092" 2.33	1.06" 27	260 1160N	320 1430N
		WK-2-ASK63LF	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-2-ASK64LF	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-2-ASK66LF	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-2-ASK68LF	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-2-ASK610LF	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-2-ASK612LF	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-2-ASK614LF	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-2-ASK616LF	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-2-ASK618LF	1.001-1.125	25.4-28.6	1.325	33.7					



Open Type Blind Rivet >> LARGE HEAD >> 5056 Alu. or 5154 Alu./Steel WK-5-ASKLF

5056 Alu. or 5154 Alu./Steel WK-5-ASKLF

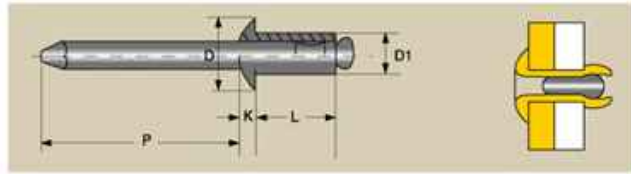

MATERIAL

BODY: 5056 or 5154 Alu.

MANDREL: Steel

FINISH

BODY: Polished

MANDREL: Zinc Plated

D1 NOM.	DRILL NO. &HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-5-ASK42LF	0.063-0.125	1.6-3.2	0.275	7.0	0.375" 9.5	0.065" 1.65	1.06" 27	170 760N	220 980N
		WK-5-ASK43LF	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-5-ASK44LF	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-5-ASK45LF	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-5-ASK46LF	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-5-ASK48LF	0.176-0.500	9.5-12.7	0.650	16.5					
		WK-5-ASK410LF	0.501-0.625	12.7-15.9	0.775	19.7					
5/32" 4.0mm	#20 4.1-4.2	WK-5-ASK52LF	0.020-0.125	0.5-3.2	0.300	7.6	0.468" 12.0	0.075" 1.90	1.06" 27	260 1160N	350 1560N
		WK-5-ASK53LF	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-5-ASK54LF	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-5-ASK56LF	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-5-ASK58LF	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-5-ASK510LF	0.501-0.625	12.7-15.9	0.800	20.3					
3/16" 4.8mm	#11 4.9-5.0	WK-5-ASK62LF	0.020-0.125	0.5-3.2	0.325	8.3	0.625" 16.0	0.092" 2.33	1.06" 27	380 1700N	500 2230N
		WK-5-ASK63LF	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-5-ASK64LF	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-5-ASK66LF	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-5-ASK68LF	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-5-ASK610LF	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-5-ASK612LF	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-5-ASK614LF	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-5-ASK616LF	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-5-ASK618LF	1.001-1.125	25.4-28.6	1.325	33.7					



Open Type Blind Rivet >> LARGE HEAD >> Alu./Alu. WK-AAKLF


Alu./Alu. WK-AAKLF



MATERIAL

BODY: 5052 Alu. Alloy

MANDREL: Alu. Alloy

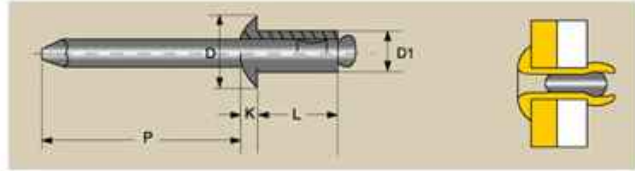

FINISH

BODY: Polished

MANDREL: Polished

D1 NOM.	DRILL NO. & HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-AAK42LF	0.063-0.125	1.6-3.2	0.275	7.0	0.375" 9.5	0.065" 1.65	1.06" 27	120 530N	150 670N
		WK-AAK43LF	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-AAK44LF	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-AAK45LF	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-AAK46LF	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-AAK48LF	0.376-0.500	9.5-12.7	0.650	16.5					
		WK-AAK410LF	0.501-0.625	12.7-15.9	0.775	19.7					
5/32" 4.0mm	#20 4.1-4.2	WK-AAK52LF	0.020-0.125	0.5-3.2	0.300	7.6	0.468" 12.0	0.075" 1.90	1.06" 27	190 850N	230 1020N
		WK-AAK53LF	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-AAK54LF	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-AAK56LF	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-AAK58LF	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-AAK510LF	0.501-0.625	12.7-15.9	0.800	20.3					
3/16" 4.8mm	#11 4.9-5.0	WK-AAK62LF	0.020-0.125	0.5-3.2	0.325	8.3	0.625" 16.0	0.092" 2.33	1.06" 27	260 1160N	320 1430N
		WK-AAK63LF	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-AAK64LF	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-AAK66LF	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-AAK68LF	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-AAK610LF	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-AAK612LF	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-AAK614LF	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-AAK616LF	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-AAK618LF	1.001-1.125	25.4-28.6	1.325	33.7					




Open Type Blind Rivet >> LARGE HEAD >> Steel/Steel WK-SS LF

Steel/Steel WK-SSKLF



MATERIAL
BODY: Steel
MANDREL: Steel

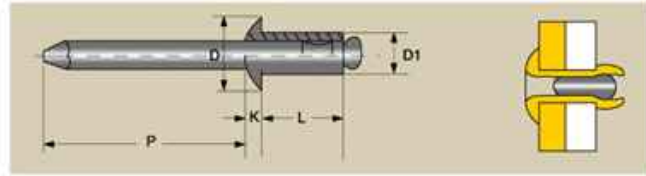

FINISH
BODY: Zinc Plated
MANDREL: Zinc Plated

D1 NOM.	DRILL NO. & HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-SSK42LF	0.063-0.125	1.6-3.2	0.275	7.0	0.375" 9.5	0.065" 1.65	1.06" 27	260 1160N	310 1380N
		WK-SSK43LF	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-SSK44LF	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-SSK45LF	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-SSK46LF	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-SSK48LF	0.376-0.500	9.5-12.7	0.650	16.5					
		WK-SSK410LF	0.501-0.625	12.7-15.9	0.775	19.7					
5/32" 4.0mm	#20 4.1-4.2	WK-SSK52LF	0.020-0.125	0.5-3.2	0.300	7.6	0.468" 12.0	0.075" 1.90	1.06" 27	370 1650N	470 2100N
		WK-SSK53LF	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-SSK54LF	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-SSK56LF	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-SSK58LF	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-SSK510LF	0.501-0.625	12.7-15.9	0.800	20.3					
3/16" 4.8mm	#11 4.9-5.0	WK-SSK62LF	0.020-0.125	0.5-3.2	0.325	8.3	0.625" 16.0	0.092" 2.33	1.06" 27	540 2400N	680 3030N
		WK-SSK63LF	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-SSK64LF	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-SSK66LF	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-SSK68LF	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-SSK610LF	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-SSK612LF	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-SSK614LF	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-SSK616LF	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-SSK618LF	1.001-1.125	25.4-28.6	1.325	33.7					



Open Type Blind Rivet >> LARGE HEAD >> Stainless Steel/Stainless Steel WK-BBKLF


Stainless Steel/Stainless Steel WK-BBKLF



MATERIAL

BODY: Stainless Steel

MANDREL: Stainless Steel

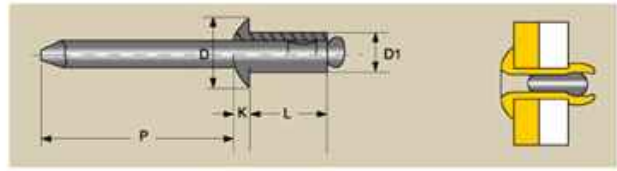

FINISH


BODY: Polished

MANDREL: Polished

D1 NOM.	DRILL NO. & HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-BBK42LF	0.083-0.125	1.6-3.2	0.275	7.0	0.375" 9.5	0.065" 1.65	1.06" 27	420 1870N	530 2360N
		WK-BBK43LF	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-BBK44LF	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-BBK45LF	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-BBK46LF	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-BBK48LF	0.176-0.500	9.5-12.7	0.650	16.5					
5/32" 4.0mm	#20 4.1-4.2	WK-BBK52LF	0.020-0.125	0.5-3.2	0.300	7.6	0.468" 12.0	0.075" 1.90	1.06" 27	650 2900N	820 3650N
		WK-BBK53LF	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-BBK54LF	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-BBK56LF	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-BBK58LF	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-BBK510LF	0.501-0.625	12.7-15.9	0.800	20.3					
3/16" 4.8mm	#11 4.9-5.0	WK-BBK62LF	0.020-0.125	0.5-3.2	0.325	8.3	0.625" 16.0	0.092" 2.33	1.06" 27	950 4230N	1200 5340N
		WK-BBK63LF	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-BBK64LF	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-BBK66LF	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-BBK68LF	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-BBK610LF	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-BBK612LF	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-BBK614LF	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-BBK616LF	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-BBK618LF	1.001-1.125	25.4-28.6	1.325	33.7					



Stainless Steel/Steel WK-BSKLF

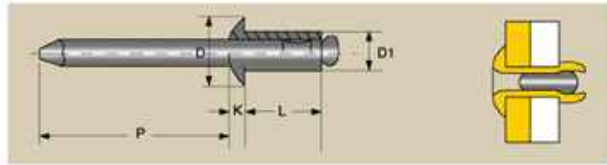

MATERIAL

BODY: Stainless Steel

MANDREL: Steel

FINISH

BODY: Polished

MANDREL: Zinc Plated

D1 NOM.	DRILL NO. &HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-BSK42LF	0.063-0.125	1.6-3.2	0.275	7.0	0.375" 9.5	0.065" 1.65	1.06" 27	420 1870N	530 2360N
		WK-BSK43LF	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-BSK44LF	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-BSK45LF	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-BSK46LF	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-BSK48LF	0.376-0.500	9.5-12.7	0.650	16.5					
5/32" 4.0mm	#20 4.1-4.2	WK-BSK52LF	0.020-0.125	0.5-3.2	0.300	7.6	0.468" 12.0	0.075" 1.90	1.06" 27	650 2900N	820 3650N
		WK-BSK53LF	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-BSK54LF	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-BSK56LF	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-BSK58LF	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-BSK510LF	0.501-0.625	12.7-15.9	0.800	20.3					
3/16" 4.8mm	#11 4.9-5.0	WK-BSK62LF	0.020-0.125	0.5-3.2	0.325	8.3	0.625" 16.0	0.092" 2.33	1.06" 27	950 4230N	1200 5340N
		WK-BSK63LF	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-BSK64LF	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-BSK66LF	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-BSK68LF	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-BSK610LF	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-BSK612LF	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-BSK614LF	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-BSK616LF	0.876-1.000	22.5-25.4	1.200	30.5					
		WK-BSK618LF	1.001-1.125	25.4-28.6	1.325	33.7					



Open Type Blind Rivet >> SPECIAL >> Alu./Steel Multi-Grip Type WK-ASMG


Alu./Steel Multi-Grip Type WK-ASMG



MATERIAL

BODY: 5052 Alu. Alloy

MANDREL: Steel

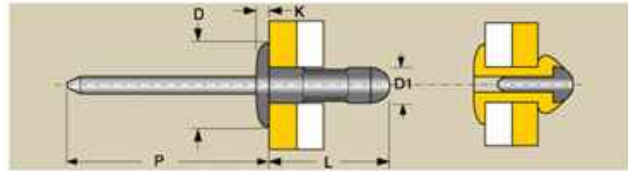

FINISH

BODY: Polished

MANDREL: Zinc Plated

D1 NOM.	DRILL NO. & HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-ASMG42	0.031-0.134	0.8-3.4	0.283	7.2	0.252" 6.4	0.051" 1.30	1.06" 27	135 600N	202 900N
		WK-ASMG43	0.031-0.187	0.8-4.8	0.331	8.4					
		WK-ASMG44	0.046-0.250	1.2-6.4	0.390	9.9					
		WK-ASMG45	0.156-0.312	4.0-7.9	0.453	11.5					
		WK-ASMG46	0.216-0.375	5.5-9.5	0.516	13.1					
		WK-ASMG47	0.250-0.437	6.4-11.1	0.610	15.5					
5/32" 4.0mm	#20 4.1-4.2	WK-ASMG52	0.020-0.125	0.5-3.2	0.283	7.2	0.312" 7.9	0.063" 1.60	1.06" 27	213 950N	337 1500N
		WK-ASMG54	0.046-0.250	1.2-6.4	0.390	9.9					
		WK-ASMG55	0.125-0.312	3.2-7.9	0.453	11.5					
		WK-ASMG56	0.156-0.375	4.0-9.5	0.516	13.1					
		WK-ASMG57	0.250-0.437	6.4-11.1	0.610	15.5					
		WK-ASMG58	0.250-0.500	6.4-12.7	0.681	17.3					
3/16" 4.8mm	#11 4.9-5.0	WK-ASMG64	0.062-0.250	1.6-6.4	0.421	10.7	0.386" 9.8	0.071" 1.80	1.06" 27	296 1320N	450 2000N
		WK-ASMG65	0.079-0.315	2.0-8.0	0.492	12.5					
		WK-ASMG66	0.125-0.375	3.2-9.5	0.587	14.9					
		WK-ASMG67	0.187-0.437	4.8-11.1	0.610	15.5					
		WK-ASMG68	0.250-0.500	6.4-12.7	0.681	17.3					
		WK-ASMG610	0.345-0.590	9.0-15.0	0.783	19.9					
		WK-ASMG612	0.500-0.781	12.7-19.8	0.992	25.2					




Alu./Steel Multi-Grip Type WK-ASMGC



MATERIAL

BODY: 5052 Alu. Alloy

MANDREL: Steel

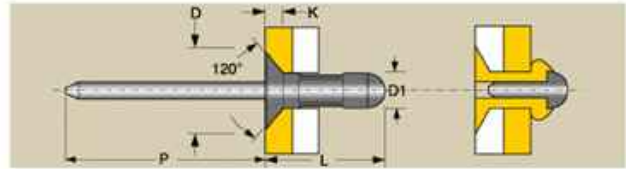

FINISH

BODY: Polished

MANDREL: Zinc Plated

D1 NOM.	DRILL NO. & HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K REF.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-ASMG44C	0.093-0.250	2.4-6.4	0.398	10.1	0.220" 5.6	0.051" 1.30	1.06" 27	135 600N	202 900N
		WK-ASMG45C	0.156-0.312	4.0-7.9	0.453	11.5					
		WK-ASMG46C	0.156-0.375	4.0-9.5	0.516	13.1					
5/32" 4.0mm	#20 4.1-4.2	WK-ASMG54C	0.046-0.250	1.2-6.4	0.398	10.1	0.281" 7.1	0.055" 1.40	1.06" 27	213 950N	337 1500N
		WK-ASMG55C	0.109-0.312	2.8-7.9	0.461	11.7					
		WK-ASMG56C	0.171-0.375	4.3-9.5	0.516	13.1					
3/16" 4.8mm	#11 4.9-5.0	WK-ASMG65C	0.125-0.312	3.2-7.9	0.492	12.5	0.348" 8.8	0.071" 1.80	1.06" 27	296 1320N	450 2000N
		WK-ASMG68C	0.250-0.500	6.4-12.7	0.681	17.3					
		WK-ASMG612C	0.500-0.781	12.7-19.8	0.992	25.2					




Alu./Stainless Steel Multi-Grip Type WK-ABMG



MATERIAL

BODY: 5052 Alu. Alloy

MANDREL: Stainless Steel

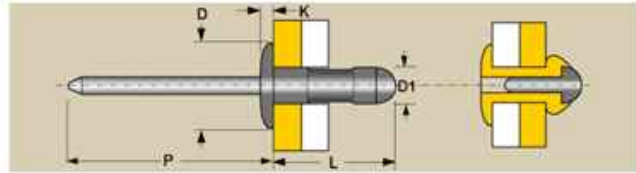

FINISH

BODY: Polished

MANDREL: Polished

D1 NOM.	DRILL NO. &HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K MAX	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-ABMG42	0.031-0.134	0.8-3.4	0.283	7.2	0.252" 6.4	0.051" 1.30	1.06" 27	135 600N	202 900N
		WK-ABMG43	0.031-0.187	0.8-4.8	0.331	8.4					
		WK-ABMG44	0.046-0.250	1.2-6.4	0.390	9.9					
		WK-ABMG45	0.156-0.312	4.0-7.9	0.453	11.5					
		WK-ABMG46	0.216-0.375	5.5-9.5	0.516	13.1					
		WK-ABMG47	.250-0.437	6.4-11.1	0.610	15.5					
5/32" 4.0mm	#20 4.1-4.2	WK-ABMG52	0.020-0.125	0.5-3.2	0.283	7.2	0.312" 7.9	0.063" 1.60	1.06" 27	213 950N	337 1500N
		WK-ABMG54	0.046-0.250	1.2-6.4	0.390	9.9					
		WK-ABMG55	0.125-0.312	3.2-7.9	0.453	11.5					
		WK-ABMG56	0.156-0.375	4.0-9.5	0.516	13.1					
		WK-ABMG57	0.250-0.437	6.4-11.1	0.610	15.5					
		WK-ABMG58	0.250-0.500	6.4-12.7	0.681	17.3					
3/16" 4.8mm	#11 4.9-5.0	WK-ABMG64	0.062-0.250	1.6-6.4	0.421	10.7	0.386" 9.8	0.071" 1.80	1.06" 27	296 1320N	450 2000N
		WK-ABMG65	0.079-0.315	2.0-8.0	0.492	12.5					
		WK-ABMG66	0.125-0.375	3.2-9.5	0.587	14.9					
		WK-ABMG67	0.187-0.437	4.8-11.1	0.610	15.5					
		WK-ABMG68	0.250-0.500	6.4-12.7	0.681	17.3					
		WK-ABMG610	0.345-0.590	9.0-15.0	0.783	19.9					
		WK-ABMG612	0.500-0.781	12.7-19.8	0.992	25.2					




开花型WK-ASP



MATERIAL

BODY: 5056 Alu.Alloy

MANDREL: Steel

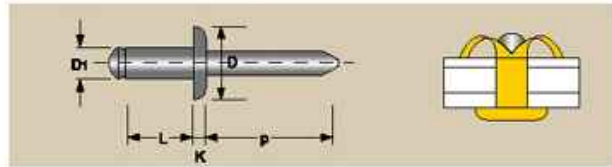

FINISH

BODY: Polished

MANDREL: Zinc Plated

D1 NOM.	HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	0.136" 3.4-3.5	WK-ASP43	0.059-0.187	1.5-4.8	0.406	10.3	0.250" 6.4	0.040" 1.02	1.06" 27	180 800N	160 720N
		WK-ASP44	0.188-0.250	4.8-6.4	0.469	11.9					
		WK-ASP45	0.251-0.312	6.4-7.9	0.528	13.4					
		WK-ASP46	0.313-0.375	7.9-9.5	0.591	15.0					
		WK-ASP48	0.376-0.500	9.5-12.7	0.717	18.2					
5/32" 4.0mm	0.167" 4.2-4.3	WK-ASP53	0.126-0.187	3.2-4.8	0.445	11.3	0.312" 7.9	0.050" 1.27	1.06" 27	285 1270N	260 1160N
		WK-ASP54	0.188-0.250	4.8-6.4	0.508	12.9					
		WK-ASP56	0.251-0.375	6.4-9.5	0.630	16.0					
		WK-ASP58	0.376-0.500	9.5-12.7	0.756	19.2					
		WK-ASP510	0.501-0.625	12.7-15.9	0.882	22.4					
		WK-ASP512	0.626-0.750	15.9-19.1	1.008	25.6					
		WK-ASP514	0.751-0.875	19.1-22.2	1.130	28.7					
3/16" 4.8mm	0.199" 5.1-5.2	WK-ASP63	0.126-0.187	3.2-4.8	0.472	12.0	0.375" 9.5	0.060" 1.52	1.06" 27	420 1870N	362 1610N
		WK-ASP64	0.188-0.250	4.8-6.4	0.535	13.6					
		WK-ASP66	0.251-0.375	6.4-9.5	0.657	16.7					
		WK-ASP68	0.376-0.500	9.5-12.7	0.783	19.9					
		WK-ASP610	0.501-0.625	12.7-15.9	0.910	23.1					
		WK-ASP612	0.626-0.750	15.9-19.1	1.035	26.3					
		WK-ASP614	0.751-0.875	19.1-22.2	1.157	29.4					
		WK-ASP616	0.876-1.000	22.2-25.4	1.283	32.6					
		WK-ASP618	1.001-1.125	25.4-28.6	1.410	35.8					




5056 Alu./Steel WK-ASF



MATERIAL

BODY: 5056 Alu.Alloy

MANDREL: Steel

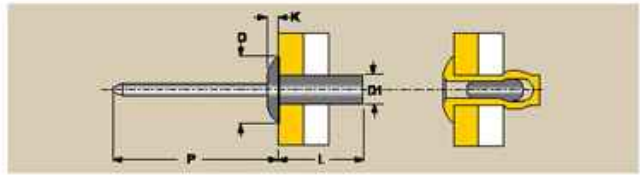

FINISH

BODY: Polished


MANDREL: Phosphated

D1 NOM.	DRILL NO. HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-ASF41	0.020-0.062	0.5-1.6	0.297	7.5	0.238" 6.0	0.050" 1.27	1.06" 27	240 1070N	280 1250N
		WK-ASF42	0.063-0.125	1.6-3.2	0.360	9.1					
		WK-ASF43	0.126-0.187	3.2-4.8	0.422	10.7					
		WK-ASF44	0.188-0.250	4.8-6.4	0.485	12.3					
		WK-ASF45	0.251-0.312	6.4-7.9	0.547	13.9					
		WK-ASF46	0.313-0.375	7.9-9.5	0.610	15.5					
		WK-ASF48	0.376-0.500	9.5-12.7	0.735	18.7					
5/32" 4.0mm	#20 4.1-4.2	WK-ASF52	0.020-0.125	0.5-3.2	0.375	9.5	0.312" 7.9	0.065" 1.65	1.06" 27	350 1560N	480 2140N
		WK-ASF53	0.126-0.187	3.2-4.8	0.437	11.1					
		WK-ASF54	0.188-0.250	4.8-6.4	0.500	12.7					
		WK-ASF55	0.251-0.312	6.4-7.9	0.562	14.3					
		WK-ASF56	0.313-0.375	7.9-9.5	0.625	15.9					
		WK-ASF58	0.376-0.500	9.5-12.7	0.750	19.1					
3/16" 4.8mm	#11 4.9-5.0	WK-ASF62	0.020-0.125	0.5-3.2	0.406	10.3	0.375" 9.5	0.080" 2.03	1.06" 27	500 2230N	690 3070N
		WK-ASF63	0.126-0.187	3.2-4.8	0.468	11.9					
		WK-ASF64	0.188-0.250	4.8-6.4	0.531	13.5					
		WK-ASF66	0.251-0.375	6.4-9.5	0.656	16.7					
		WK-ASF68	0.376-0.500	9.5-12.7	0.781	19.8					
		WK-ASF610	0.501-0.625	12.7-15.9	0.906	23.0					
		WK-ASF612	0.626-0.750	15.9-19.1	1.026	26.1					
1/4" 6.4mm	F 6.5-6.6	WK-ASF82	0.020-0.125	0.5-3.2	0.445	11.3	0.500" 12.7	0.100" 2.54	1.25" 32	900 4000N	1100 4890N
		WK-ASF84	0.126-0.250	3.2-6.4	0.570	14.5					
		WK-ASF86	0.251-0.375	6.4-9.5	0.695	17.7					
		WK-ASF88	0.376-0.500	9.5-12.7	0.820	20.8					
		WK-ASF810	0.501-0.625	12.7-15.9	0.945	24.0					
		WK-ASF812	0.626-0.750	15.9-19.1	1.070	27.2					
		WK-ASF814	0.751-0.875	19.1-22.2	1.195	30.4					
		WK-ASF816	0.876-1.000	22.2-25.4	1.320	33.5					



Closed Type Blind Rivet >> NORMAL >> Alu./Alu. WK-AAK

Alu./Alu. WK-AAF

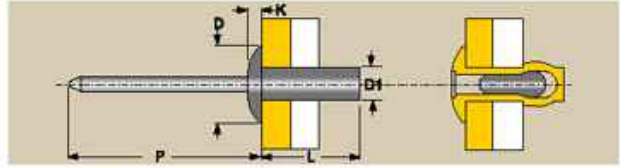

MATERIAL

BODY: Alu.Alloy

MANDREL: Alu.Alloy

FINISH

BODY: Polished

MANDREL: Polished


D1 NOM.	DRILL NO. &HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-AAF41	0.020-0.082	0.5-1.6	0.297	7.5	0.238" 9.5	0.050" 2.1	1.06" 27	100 445N	110 490N
		WK-AAF42	0.063-0.125	1.6-3.2	0.360	9.1					
		WK-AAF43	0.126-0.187	3.2-4.8	0.422	10.7					
		WK-AAF44	0.188-0.250	4.8-6.4	0.485	12.3					
		WK-AAF45	0.251-0.312	6.4-7.9	0.547	13.9					
		WK-AAF46	0.313-0.375	7.9-9.5	0.610	15.5					
		WK-AAF48	0.376-0.500	9.5-12.7	0.735	18.7					
5/32" 4.0mm	#20 4.1-4.2	WK-AAF52	0.020-0.125	0.5-3.2	0.375	9.5	0.312" 7.9	0.065" 1.65	1.06" 27	130 580N	160 710N
		WK-AAF53	0.126-0.187	3.2-4.8	0.437	11.1					
		WK-AAF54	0.188-0.250	4.8-6.4	0.500	12.7					
		WK-AAF55	0.251-0.312	6.4-7.9	0.562	14.3					
		WK-AAF56	0.313-0.375	7.9-9.5	0.625	15.9					
		WK-AAF58	0.376-0.500	9.5-12.7	0.750	19.1					
3/16" 4.8mm	#11 4.9-5.0	WK-AAF62	0.020-0.125	0.5-3.2	0.406	10.3	0.375" 9.5	0.080" 2.03	1.06" 27	210 940N	250 1110N
		WK-AAF63	0.126-0.187	3.2-4.8	0.468	11.9					
		WK-AAF64	0.188-0.250	4.8-6.4	0.531	13.5					
		WK-AAF66	0.251-0.375	6.4-9.5	0.656	16.7					
		WK-AAF68	0.376-0.500	9.5-12.7	0.781	19.8					
		WK-AAF610	0.501-0.625	12.7-15.9	0.906	23.0					
		WK-AAF612	0.626-0.750	15.9-19.1	1.026	26.1					



Steel/Steel WK-SSF



MATERIAL
BODY: Steel
MANDREL: Steel

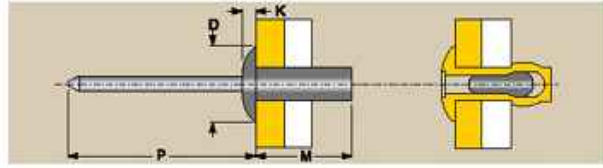

FINISH
BODY: Zinc Plated
MANDREL: Zinc Plated

D1 NOM.	DRILL NO. & HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-SSF41	0.020-0.062	0.5-1.6	0.297	7.5	0.238" 9.5	0.050" 2.1	1.06" 27	258 1150N	292 1300N
		WK-SSF42	0.063-0.125	1.6-3.2	0.360	9.1					
		WK-SSF43	0.126-0.187	3.2-4.8	0.422	10.7					
		WK-SSF44	0.188-0.250	4.8-6.4	0.485	12.3					
		WK-SSF45	0.251-0.312	6.4-7.9	0.547	13.9					
		WK-SSF46	0.313-0.375	7.9-9.5	0.610	15.5					
		WK-SSF48	0.376-0.500	9.5-12.7	0.735	18.7					
5/32" 4.0mm	#20 4.1-4.2	WK-SSF52	0.020-0.125	0.5-3.2	0.375	9.5	0.312" 7.9	0.065" 1.65	1.06" 27	380 1700N	418 1860N
		WK-SSF53	0.126-0.187	3.2-4.8	0.437	11.1					
		WK-SSF54	0.188-0.250	4.8-6.4	0.500	12.7					
		WK-SSF55	0.251-0.312	6.4-7.9	0.562	14.3					
		WK-SSF56	0.313-0.375	7.9-9.5	0.625	15.9					
		WK-SSF58	0.376-0.500	9.5-12.7	0.750	19.1					
3/16" 4.8mm	#11 4.9-5.0	WK-SSF62	0.020-0.125	0.5-3.2	0.406	10.3	0.375" 9.5	0.080" 2.03	1.06" 27	540 2400N	630 2800N
		WK-SSF63	0.126-0.187	3.2-4.8	0.468	11.9					
		WK-SSF64	0.188-0.250	4.8-6.4	0.531	13.5					
		WK-SSF66	0.251-0.375	6.4-9.5	0.656	16.7					
		WK-SSF68	0.376-0.500	9.5-12.7	0.781	19.8					
		WK-SSF610	0.501-0.625	12.7-15.9	0.906	23.0					
		WK-SSF612	0.626-0.750	15.9-19.1	1.026	26.1					
1/4" 6.4mm	F 6.5-6.6	WK-SSF82	0.020-0.125	0.5-3.2	0.445	11.3	0.500" 12.7	0.100" 2.54	1.25" 32	810 3600N	900 4000N
		WK-SSF84	0.126-0.250	3.2-6.4	0.570	14.5					
		WK-SSF86	0.251-0.375	6.4-9.5	0.695	17.7					
		WK-SSF88	0.376-0.500	9.5-12.7	0.820	20.8					
		WK-SSF810	0.501-0.625	12.7-15.9	0.945	24.0					
		WK-SSF812	0.626-0.750	15.9-19.1	1.070	27.2					
		WK-SSF814	0.751-0.875	19.1-22.2	1.195	30.4					
		WK-SSF816	0.876-1.000	22.2-25.4	1.320	33.5					



Closed Type Blind Rivet >> NORMAL >> Stainless Steel WK-BBF-S


Stainless Steel WK-BBF-S



MATERIAL

BODY: Stainless Steel

MANDREL: Stainless Steel

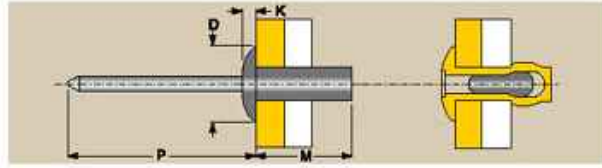

FINISH


BODY: Polished

MANDREL: Polished

D1 NOM.	DRILL NO. &HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-BBF-S41	0.020-0.062	0.5-1.6	0.297	7.5	0.238" 6.0	0.050" 1.27	1.06" 27	400 1780N	450 2000N
		WK-BBF-S42	0.063-0.125	1.6-3.2	0.360	9.1					
		WK-BBF-S43	0.126-0.187	3.2-4.8	0.422	10.7					
		WK-BBF-S44	0.188-0.250	4.8-6.4	0.485	12.3					
		WK-BBF-S45	0.251-0.312	6.4-7.9	0.547	13.9					
		WK-BBF-S46	0.313-0.375	7.9-9.5	0.610	15.5					
		WK-BBF-S48	0.376-0.500	9.5-12.7	0.735	18.7					
5/32" 4.0mm	#20 4.1-4.2	WK-BBF-S52	0.020-0.125	0.5-3.2	0.375	9.5	0.312" 7.9	0.065" 1.65	1.06" 27	700 3120N	800 3560N
		WK-BBF-S53	0.126-0.187	3.2-4.8	0.437	11.1					
		WK-BBF-S54	0.188-0.250	4.8-6.4	0.500	12.7					
		WK-BBF-S55	0.251-0.312	6.4-7.9	0.562	14.3					
		WK-BBF-S56	0.313-0.375	7.9-9.5	0.625	15.9					
		WK-BBF-S58	0.376-0.500	9.5-12.7	0.750	19.1					
3/16" 4.8mm	#11 4.9-5.0	WK-BBF-S62	0.020-0.125	0.5-3.2	0.406	10.3	0.375" 9.5	0.080" 2.03	1.06" 27	850 3790N	900 4010N
		WK-BBF-S63	0.126-0.187	3.2-4.8	0.468	11.9					
		WK-BBF-S64	0.188-0.250	4.8-6.4	0.531	13.5					
		WK-BBF-S66	0.251-0.375	6.4-9.5	0.656	16.7					
		WK-BBF-S68	0.376-0.500	9.5-12.7	0.781	19.8					
		WK-BBF-S610	0.501-0.625	12.7-15.9	0.906	23.0					
		WK-BBF-S612	0.626-0.750	15.9-19.1	1.026	26.1					
1/4" 6.4mm	F 6.5-6.6	WK-BBF-S82	0.020-0.125	0.5-3.2	0.445	11.3	0.500" 12.7	0.100" 2.54	1.25" 32	1348 6000N	1797 8000N
		WK-BBF-S84	0.126-0.250	3.2-6.4	0.570	14.5					
		WK-BBF-S86	0.251-0.375	6.4-9.5	0.695	17.7					
		WK-BBF-S88	0.376-0.500	9.5-12.7	0.820	20.8					
		WK-BBF-S810	0.501-0.625	12.7-15.9	0.945	24.0					
		WK-BBF-S812	0.626-0.750	15.9-19.1	1.070	27.2					
		WK-BBF-S814	0.751-0.875	19.1-22.2	1.195	30.4					
		WK-BBF-S816	0.876-1.000	22.2-25.4	1.320	33.5					



Alu./Stainless Steel WK-ABF

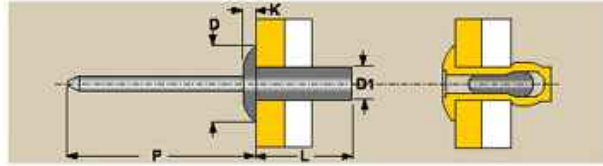

MATERIAL

BODY: 5056 Alu.Alloy

MANDREL: Stainless Steel

FINISH

BODY: Polished

MANDREL: Polished


D1 NOM.	DRILL NO. &HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-ABF41	0.020-0.062	0.5-1.6	0.297	7.5	0.238" 6.0	0.050" 1.27	1.06" 27	240 1070N	280 1250N
		WK-ABF42	0.063-0.125	1.6-3.2	0.360	9.1					
		WK-ABF43	0.126-0.187	3.2-4.8	0.422	10.7					
		WK-ABF44	0.188-0.250	4.8-6.4	0.485	12.3					
		WK-ABF45	0.251-0.312	6.4-7.9	0.547	13.9					
		WK-ABF46	0.313-0.375	7.9-9.5	0.610	15.5					
		WK-ABF48	0.376-0.500	9.5-12.7	0.735	18.7					
5/32" 4.0mm	#20 4.1-4.2	WK-ABF52	0.020-0.125	0.5-3.2	0.375	9.5	0.312" 7.9	0.085" 1.65	1.06" 27	350 1560N	480 2140N
		WK-ABF53	0.126-0.187	3.2-4.8	0.437	11.1					
		WK-ABF54	0.188-0.250	4.8-6.4	0.500	12.7					
		WK-ABF55	0.251-0.312	6.4-7.9	0.562	14.3					
		WK-AS56F	0.313-0.375	7.9-9.5	0.625	15.9					
		WK-ABF58	0.376-0.500	9.5-12.7	0.750	19.1					
3/16" 4.8mm	#11 4.9-5.0	WK-ABF62	0.020-0.125	0.5-3.2	0.406	10.3	0.375" 9.5	0.080" 2.03	1.06" 27	500 2230N	690 3070N
		WK-ABF63	0.126-0.187	3.2-4.8	0.468	11.9					
		WK-ABF64	0.188-0.250	4.8-6.4	0.531	13.5					
		WK-ABF66	0.251-0.375	6.4-9.5	0.656	16.7					
		WK-ABF68	0.376-0.500	9.5-12.7	0.781	19.8					
		WK-ABF610	0.501-0.625	12.7-15.9	0.906	23.0					
		WK-ABF612	0.626-0.750	15.9-19.1	1.026	26.1					
1/4" 6.4mm	F 6.5-6.6	WK-ABF82	0.020-0.125	0.5-3.2	0.445	11.3	0.500" 12.7	0.100" 2.54	1.25" 32	900 4000N	1100 4890N
		WK-ABF84	0.126-0.250	3.2-6.4	0.570	14.5					
		WK-ABF86	0.251-0.375	6.4-9.5	0.695	17.7					
		WK-ABF88	0.376-0.500	9.5-12.7	0.820	20.8					
		WK-ABF810	0.501-0.625	12.7-15.9	0.945	24.0					
		WK-ABF812	0.626-0.750	15.9-19.1	1.070	27.2					
		WK-ABF814	0.751-0.875	19.1-22.2	1.195	30.4					
		WK-ABF816	0.876-1.000	22.2-25.4	1.320	33.5					



Copper/Steel WK-CSF



MATERIAL
BODY: Copper
MANDREL: Steel

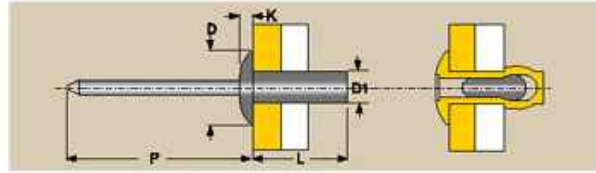

FINISH
BODY: Polished
MANDREL: Phosphated

D1 NOM.	DRILL NO. &HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2	#30 3.3-3.4	WK-CSF41	0.020-0.062	0.5-1.6	0.279	7.5	0.238" 6.0	0.050" 1.27	1.06" 27	220 980N	300 1340N
		WK-CSF42	0.063-0.125	1.6-3.2	0.360	9.1					
		WK-CSF43	0.126-0.187	3.2-4.8	0.422	10.7					
		WK-CSF44	0.188-0.250	4.8-6.4	0.485	12.3					
		WK-CSF45	0.251-0.312	6.4-7.9	0.547	13.9					
		WK-CSF46	0.313-0.375	7.9-9.5	0.610	15.5					
		WK-CSF48	0.376-0.500	9.5-12.7	0.735	18.7					
5/32" 4.0	#20 4.1-4.2	WK-CSF52	0.020-0.125	0.5-3.2	0.375	9.5	0.312" 7.9	0.065" 1.65	1.06" 27	305 1350N	450 2000N
		WK-CSF53	0.126-0.187	3.2-4.8	0.437	11.1					
		WK-CSF54	0.188-0.250	4.8-6.4	0.500	12.7					
		WK-CSF55	0.251-0.312	6.4-7.9	0.562	14.3					
		WK-CSF56	0.313-0.375	7.9-9.5	0.625	15.9					
		WK-CSF58	0.376-0.500	9.5-12.7	0.750	19.1					
3/16" 4.8	#11 4.9-5.0	WK-CSF62	0.020-0.125	0.5-3.2	0.406	10.3	0.375" 9.5	0.080" 2.03	1.06" 27	438 1950N	630 2800N
		WK-CSF63	0.126-0.187	3.2-4.8	0.468	11.9					
		WK-CSF64	0.188-0.250	4.8-6.4	0.631	13.5					
		WK-CSF66	0.251-0.375	6.4-9.5	0.656	16.7					
		WK-CSF68	0.376-0.500	9.5-12.7	0.781	19.8					
		WK-CSF610	0.501-0.625	12.7-15.9	0.906	23.0					
		WK-CSF612	0.626-0.750	15.9-19.1	1.026	26.1					



Closed Type Blind Rivet >> NORMAL >> Copper/Stainless Steel WK-CBF


Copper/Stainless Steel WK-CBF



MATERIAL

BODY: Copper

MANDREL: Stainless Steel

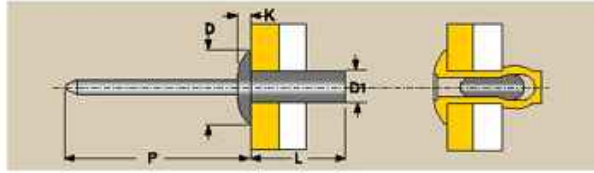

FINISH

BODY: Polished

MANDREL: Polished

D1 NOM.	DRILL NO. &HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2	#30 3.3-3.4	WK-CBF41	0.020-0.062	0.5-1.6	0.279	7.5	0.238" 6.0	0.050" 1.27	1.06" 27	220 980N	300 1340N
		WK-CBF42	0.063-0.125	1.6-3.2	0.360	9.1					
		WK-CBF43	0.126-0.187	3.2-4.8	0.422	10.7					
		WK-CBF44	0.188-0.250	4.8-6.4	0.485	12.3					
		WK-CBF45	0.251-0.312	6.4-7.9	0.547	13.9					
		WK-CBF46	0.313-0.375	7.9-9.5	0.610	15.5					
		WK-CBF48	0.376-0.500	9.5-12.7	0.735	18.7					
5/32" 4.0	#20 4.1-4.2	WK-CBF52	0.020-0.125	0.5-3.2	0.375	9.5	0.312" 7.9	0.065" 1.65	1.06" 27	305 1350N	450 2000N
		WK-CBF53	0.126-0.187	3.2-4.8	0.437	11.1					
		WK-CBF54	0.188-0.250	4.8-6.4	0.500	12.7					
		WK-CBF55	0.251-0.312	6.4-7.9	0.562	14.3					
		WK-CBF56	0.313-0.375	7.9-9.5	0.625	15.9					
		WK-CBF58	0.376-0.500	9.5-12.7	0.750	19.1					
3/16" 4.8	#11 4.9-5.0	WK-CBF62	0.020-0.125	0.5-3.2	0.406	10.3	0.375" 9.5	0.080" 2.03	1.06" 27	438 1950N	630 2800N
		WK-CBF63	0.126-0.187	3.2-4.8	0.468	11.9					
		WK-CBF64	0.188-0.250	4.8-6.4	0.631	13.5					
		WK-CBF66	0.251-0.375	6.4-9.5	0.656	16.7					
		WK-CBF68	0.376-0.500	9.5-12.7	0.781	19.8					
		WK-CBF610	0.501-0.625	12.7-15.9	0.906	23.0					
		WK-CBF612	0.626-0.750	15.9-19.1	1.026	26.1					



Closed Type Blind Rivet >> CSK HEAD >> 5056 Alu./Steel WK-ASF C


5056 Alu./Steel WK-ASF C



MATERIAL

BODY: 5056 Alu.Alloy

MANDREL: Steel

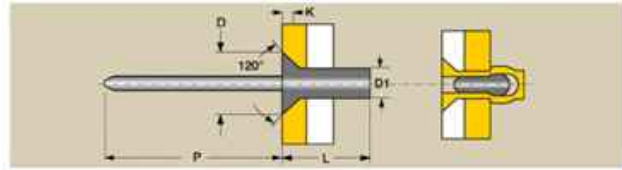

FINISH

BODY: Polished

MANDREL: Phosphated

D1 NOM.	DRILL NO. &HOLE SIZE	ART. CODE	GRIP RANGE		L (MAX)		D NOM.	K REF.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-ASF42C	0.063-0.125	1.6-3.2	0.395	10.0	0.233" 5.9	0.042" 1.07	1.06" 27	240 1070N	280 1250N
		WK-ASF43C	0.126-0.187	3.2-4.8	0.457	11.6					
		WK-ASF44C	0.188-0.250	4.8-6.4	0.520	13.2					
		WK-ASF45C	0.251-0.312	6.4-7.9	0.582	14.8					
		WK-ASF46C	0.313-0.375	7.9-9.5	0.645	16.4					
		WK-ASF48C	0.376-0.500	9.5-12.7	0.770	19.6					
5/32" 4.0mm	#20 4.1-4.2	WK-ASF52C	0.063-0.125	1.6-3.2	0.425	10.8	0.312" 7.9	0.051" 1.29	1.06" 27	350 1560N	480 2140N
		WK-ASF53C	0.126-0.187	3.2-4.8	0.487	12.4					
		WK-ASF54C	0.188-0.250	4.8-6.4	0.550	14.0					
		WK-ASF55C	0.251-0.312	6.4-7.9	0.612	15.5					
		WK-ASF56C	0.313-0.375	7.9-9.5	0.675	17.1					
		WK-ASF58C	0.376-0.500	9.5-12.7	0.800	20.3					
3/16" 4.8mm	#11 4.9-5.0	WK-ASF62C	0.063-0.125	1.6-3.2	0.471	12.0	0.375" 9.5	0.060" 1.52	1.06" 27	500 2230N	690 3070N
		WK-ASF63C	0.126-0.187	3.2-4.8	0.538	13.7					
		WK-ASF64C	0.188-0.250	4.8-6.4	0.601	15.3					
		WK-ASF66C	0.251-0.375	6.4-9.5	0.736	18.7					
		WK-ASF68C	0.376-0.500	9.5-12.7	0.851	21.6					
		WK-ASF610C	0.501-0.625	12.7-15.9	1.026	26.1					
		WK-ASF612C	0.626-0.750	15.9-19.1	1.101	28.0					
1/4" 6.4mm	F 6.5-6.6	WK-ASF82C	0.020-0.125	0.5-3.2	0.525	13.3	0.500" 12.7	0.080" 2.03	1.25" 32	900 4000N	1100 4890N
		WK-ASF84C	0.126-0.250	3.2-6.4	0.650	16.5					
		WK-ASF86C	0.251-0.375	6.4-9.5	0.775	19.7					
		WK-ASF88C	0.376-0.500	9.5-12.7	0.900	22.9					
		WK-ASF810C	0.501-0.625	12.7-15.9	1.025	26.0					
		WK-ASF812C	0.626-0.750	15.9-19.1	1.150	29.2					
		WK-ASF814C	0.751-0.875	19.1-22.2	1.275	32.4					



Closed Type Blind Rivet >> LARGE HEAD >> 5056 Alu./Steel WK-ASFLF


5056 Alu./Steel WK-ASFLF



MATERIAL

BODY: 5056 Alu.Alloy

MANDREL: Steel

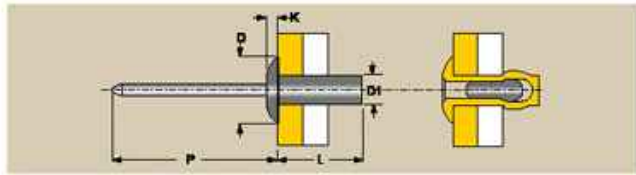

FINISH


BODY: Polished

MANDREL: Phosphated

D1 NOM.	DRILL NO. &HOLE SIZE	ART.CODE	GRIP RANGE		L(MAX)		D NOM.	K MAX.	P MIN.	SHEAR LBS	TENSILE LBS
			INCH	MM	INCH	MM					
1/8" 3.2mm	#30 3.3-3.4	WK-ASF41LF	0.020-0.062	0.5-1.6	0.297	7.5	0.375" 9.5	0.082" 2.1	1.06" 27	240 1070N	280 1250N
		WK-ASF42LF	0.063-0.125	1.6-3.2	0.360	9.1					
		WK-ASF43 LF	0.126-0.187	3.2-4.8	0.422	10.7					
		WK-ASF44LF	0.188-0.250	4.8-6.4	0.485	12.3					
		WK-ASF45LF	0.251-0.312	6.4-7.9	0.547	13.9					
		WK-ASF46LF	0.313-0.375	7.9-9.5	0.610	15.5					
		WK-ASF48LF	0.376-0.500	9.5-12.7	0.735	18.7					
5/32" 4.0mm	#20 4.1-4.2	WK-ASF52LF	0.020-0.125	0.5-3.2	0.375	9.5	0.468" 12.0	0.102" 2.6	1.06" 27	350 1560N	480 2140N
		WK-ASF53LF	0.126-0.187	3.2-4.8	0.437	11.1					
		WK-ASF54LF	0.188-0.250	4.8-6.4	0.500	12.7					
		WK-ASF55LF	0.251-0.312	6.4-7.9	0.562	14.3					
		WK-ASF56LF	0.313-0.375	7.9-9.5	0.625	15.9					
		WK-ASF58LF	0.376-0.500	9.5-12.7	0.750	19.1					
3/16" 4.8mm	#11 4.9-5.0	WK-ASF62 LF	0.020-0.125	0.5-3.2	0.406	10.3	0.625" 16.0	0.110" 2.8	1.06" 27	500 2230N	690 3070N
		WK-ASF63LF	0.126-0.187	3.2-4.8	0.468	11.9					
		WK-ASF64LF	0.188-0.250	4.8-6.4	0.531	13.5					
		WK-ASF66LF	0.251-0.375	6.4-9.5	0.656	16.7					
		WK-ASF68LF	0.376-0.500	9.5-12.7	0.781	19.8					
		WK-ASF610LF	0.501-0.625	12.7-15.9	0.906	23.0					
		WK-ASF612LF	0.626-0.750	15.9-19.1	1.026	26.1					



WK-SS71

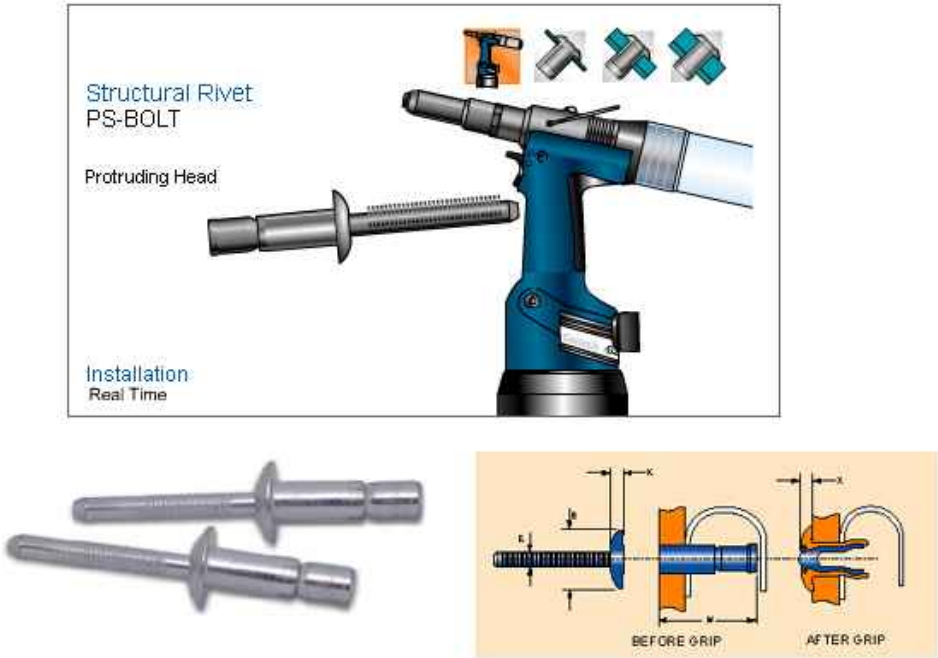


MATERIAL
BODY: Carbon Steel
MANDREL: Carbon Steel

FINISH
BODY: Zinc Plated
MANDREL: Zinc Plated

Size	Drill	Part No.	M	Grip Range	B	K	E	X	Shear	Tensile	PULL OUT
			max		max	max	max	max	KN	KN	N
4.8 (3/16")	Φ  4.9 5.1	WK-SS71-4810	18.2	1.63-6.86	10.1	2.1	2.9	2.9	5.8	4.1	≥ 445
		WK-SS71-4814	24.4	1.63-11.10	10.1	2.1	2.9	2.9	5.8	4.1	≥ 445
6.4 (1/4")	Φ  6.6 7.0	WK-SS71-6414	23.7	2.03-9.53	13.3	2.9	3.9	3.7	10.5	8.0	≥ 1112
		WK-SS71-6419	32.9	2.03-15.87	13.3	2.9	3.9	3.7	10.5	8.0	≥ 1112



WK-AA71

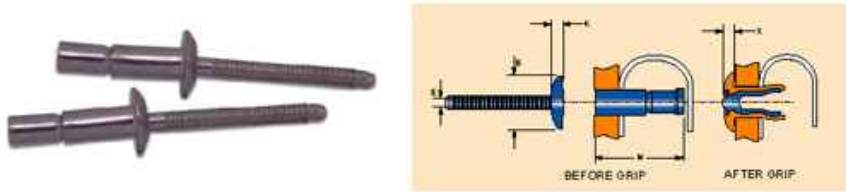

MATERIAL

BODY: Aluminium Alloy

MANDREL: Aluminium Alloy

FINISH


BODY: Natural

MANDREL: Natural

Size	Drill	Part No.	M	Grip Range	B	K	E	X	Shear	Tensile	PULL OUT
			max		max	max	max	max	KN	KN	N
4.8 (3/16")	 4.9 5.1	WK-AA71-4810	18.2	1.63-6.86	10.1	2.1	2.9	2.9	2.4	2.0	≥ 222
		WK-AA71-4814	24.4	1.63-11.10	10.1	2.1	2.9	2.9	2.4	2.0	≥ 222
6.4 (1/4")	 6.6 7.0	WK-AA71-6414	23.7	2.03-9.53	13.3	2.9	3.9	3.7	5.6	3.7	≥ 445
		WK-AA71-6419	32.9	2.03-15.87	13.3	2.9	3.9	3.7	5.6	3.7	≥ 445



WK-BB71

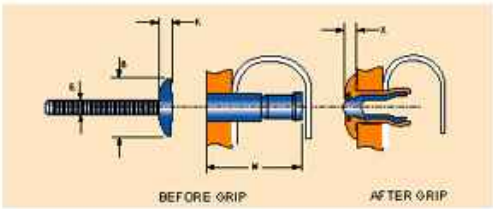

MATERIAL

BODY: 300 Stainless steel

MANDREL: 300 Stainless steel

FINISH


BODY: Natural

MANDREL: Natural

Size	Drill	Part No.	M	Grip Range	B	K	E	X	Shear	Tensile	PULL OUT
			max		max	max	max	max	KN	KN	N
4.8 (3/16")	Φ  4.9 5.1	WK-BB71-4810	18.2	1.63-6.86	10.1	2.1	2.9	2.9	6	4.5	≥ 445
		WK-BB71-4814	24.4	1.63-11.10	10.1	2.1	2.9	2.9	6	4.5	≥ 445
6.4 (1/4")	Φ  6.6 7.0	WK-BB71-6414	23.7	2.03-9.53	13.3	2.9	3.9	3.7	10.5	8.2	≥ 1112
		WK-BB71-6419	32.9	2.03-15.87	13.3	2.9	3.9	3.7	10.5	8.2	≥ 1112



WK-SSC71

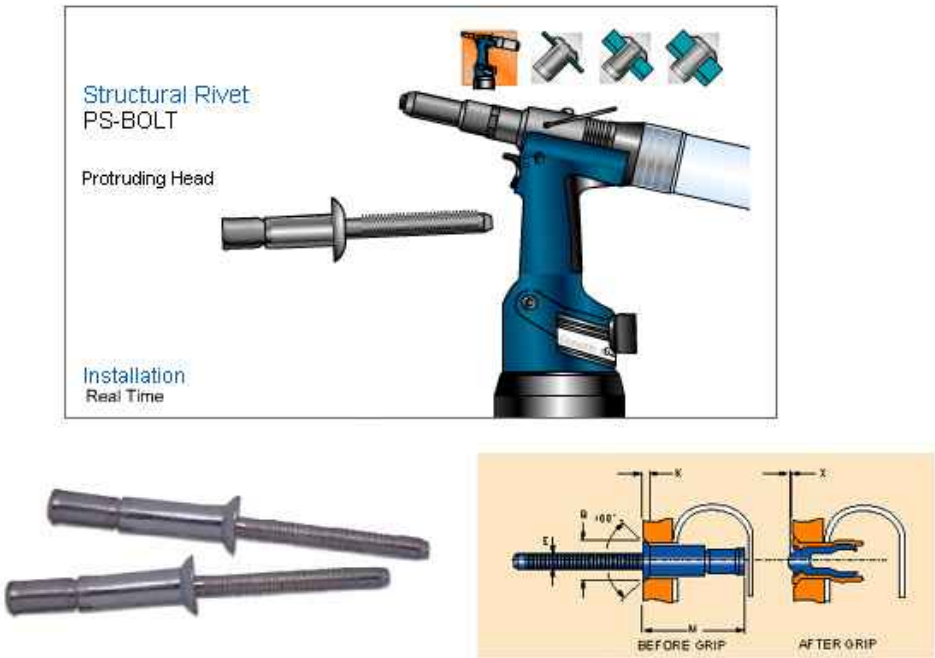

MATERIAL

BODY: Carbon Steel

MANDREL: Carbon Steel

FINISH


BODY: Zinc Plated

MANDREL: Zinc Plated

Size	Drill	Part No.	M	Grip Range	B	K	E	X	Shear KN	Tensile KN	PULL OUT
			max		max	max	max	max			N
4.8 (3/16")	 4.9 5.1	WK-SSC71-4810	20	3.17-8.41	8.5	2.2	2.9	0.8	5.8	4.1	≥ 445
		WK-SSC71-4814	26.2	3.17-12.22	8.5	2.2	2.9	0.8	5.8	4.1	≥ 445
6.4 (1/4")	 6.6 7.0	WK-SSC71-6414	26.3	3.17-12.07	10.1	2.4	3.9	0.8	10.5	8.0	≥ 1112



WK-SSN

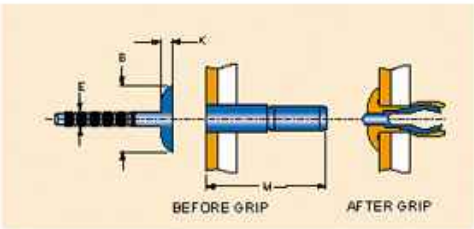

MATERIAL
BODY: Carbon Steel
MANDREL: Carbon Steel

FINISH
BODY: Zinc Plated
MANDREL: Zinc Plated


Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
4.8 (3/16")	Φ  4.9 5.1	WK-SSN-4810	18.2	1.58-6.85	10.2	2.3	3.1	5.6	4.4
		WK-SSN-4814	24.6	1.58-11.09	10.2	2.3	3.1	5.6	4.4
6.4 (1/4")	Φ  6.6 7.0	WK-SSN-6414	25.3	2.04-9.52	13.5	2.9	4.1	10.5	8.2
		WK-SSN-6419	35.6	2.04-15.87	13.5	2.9	4.1	10.5	8.2



WK-AAN



MATERIAL
BODY: Aluminium Alloy
MANDREL: Aluminium Alloy

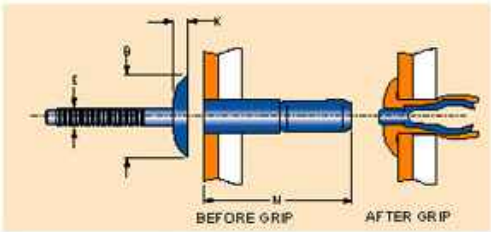

FINISH
BODY: Natural
MANDREL: Natural


Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
4.8 (3/16")	Φ  4.9 5.1	WK-AAN-4810	18.2	1.58-6.85	10.2	2.3	3.0	2.3	1.9
		WK-AAN-4814	24.6	1.58-11.09	10.2	2.3	3.0	2.3	1.9
6.4 (1/4")	Φ  6.6 7.0	WK-AAN-6414	25.3	2.04-9.52	13.5	2.9	4.0	5.3	3.4
		WK-AAN-6419	35.6	2.04-15.87	13.5	2.9	4.0	5.3	3.4



WK-BBN



MATERIAL
BODY: 300 Series Stainless Steel
MANDREL: 300 Series Stainless Steel

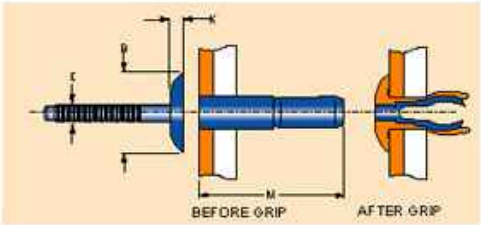


FINISH
BODY: Natural
MANDREL: Natural

Size	Drill	Part No.	M		M	Grip Range	B	K	E	Shear	Tensile
			max		max		max	max	max	KN	KN
4.8 (3/16")	 4.9 5.1	WK-BBN-4810	18.2	31310	18.2	1.58-6.85	10.2	2.3	3.0	6.0	4.5
		WK-BBN-4814	24.6	31314	24.6	1.58-11.09	10.2	2.3	3.0	6.0	4.5
6.4 (1/4")	 6.6 7.0	WK-BBN-6414	25.3	41414	25.3	2.04-9.52	13.5	2.9	4.0	10.5	0.2
		WK-BBN-6419	35.6	41419	35.6	2.04-15.87	13.5	2.9	4.0	10.5	0.2



WK-SSNC

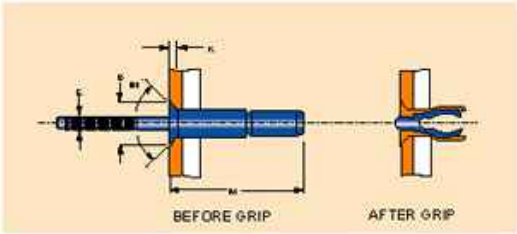


MATERIAL
BODY: Carbon Steel
MANDREL: Carbon Steel

FINISH
BODY: Zinc Plated
MANDREL: Zinc Plated

Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
4.8 (3/16")	 4.9 5.1	WK-SSNC-4810	20.2	3.17-8.41	8.8	1.8	3.1	5.4	4.0
6.4 (1/4")	 6.6 7.0	WK-SSNC-6414	28.3	4.32-12.06	10.6	2.0	4.1	10.5	8.0



WK-SS21

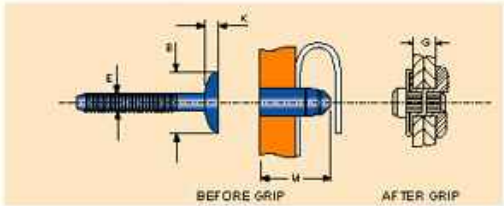

MATERIAL
BODY: 1022
MANDREL: 1045

FINISH
BODY: Zinc Plated
MANDREL: Zinc Plated

Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
6.4 (1/4")	 6.7 6.9	WK-SS21-0812	13.7	1.50-3.50	13.4	2.7	3.9	10.0	7.8
		WK-SS21-0813	15.0	2.80-4.80	13.4	2.7	3.9	11.0	7.8
		WK-SS21-0814	15.6	3.35-5.35	13.4	2.7	3.9	12.0	7.8
		WK-SS21-0815	17.0	4.80-6.80	13.4	2.7	3.9	12.5	7.8
		WK-SS21-0817	19.0	6.80-8.80	13.4	2.7	3.9	13.0	7.8
		WK-SS21-0818	19.7	7.50-9.50	13.4	2.7	3.9	14.0	7.8
		WK-SS21-0819	21.0	8.80-10.80	13.4	2.7	3.9	14.5	7.8
		WK-SS21-0821	23.0	10.80-12.80	13.4	2.7	3.9	15.0	7.8




Structural Rivet >> HEM-FIX >> WK-SS22

Structural Rivet
HEM-FIX

Protruding Head



Installation
Real Time

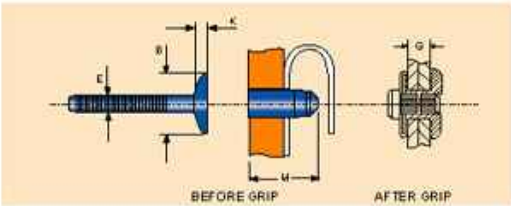

MATERIAL

BODY: Carbon Steel

MANDREL: Carbon Steel

FINISH


BODY: Zinc Plated

MANDREL: Zinc Plated

Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
6.4 (1/4")	 6.7 6.9	WK-SS22-0812	13.7	1.50-3.50	13.4	2.7	3.9	10.5	8.8
		WK-SS22-0813	15.0	2.80-4.80	13.4	2.7	3.9	12.0	8.8
		WK-SS22-0814	15.6	3.35-5.35	13.4	2.7	3.9	12.5	8.8
		WK-SS22-0815	17.0	4.80-6.80	13.4	2.7	3.9	12.5	8.8
		WK-SS22-0817	19.0	6.80-8.80	13.4	2.7	3.9	14.0	8.8
		WK-SS22-0818	19.7	7.50-9.50	13.4	2.7	3.9	15.0	8.8
		WK-SS22-0819	22.0	8.80-10.80	13.4	2.7	3.9	16.0	8.8
		WK-SS22-0821	23.0	10.80-12.80	13.4	2.7	3.9	16.0	8.8



WK-SS23

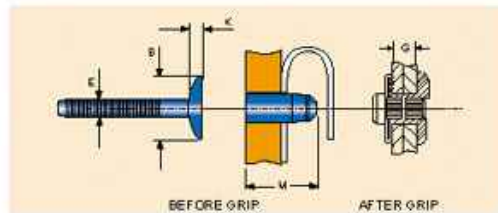


MATERIAL
BODY: 1010
MANDREL: 1045

FINISH
BODY: Zinc Plated
MANDREL: Zinc Plated

Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
6.4 (1/4")	 6.7 6.9	WK-SS23-0812	13.7	1.50-3.50	13.4	2.7	3.9	5.2	6.0
		WK-SS23-0813	15.0	2.80-4.80	13.4	2.7	3.9	6.0	6.0
		WK-SS23-0814	15.6	3.35-5.35	13.4	2.7	3.9	6.5	6.0
		WK-SS23-0815	17.0	4.80-6.80	13.4	2.7	3.9	7.0	6.0
		WK-SS23-0817	19.0	6.80-8.80	13.4	2.7	3.9	7.5	6.0
		WK-SS23-0818	19.7	7.50-9.50	13.4	2.7	3.9	8.0	6.0
		WK-SS23-0819	21.0	8.80-10.80	13.4	2.7	3.9	8.5	6.0
		WK-SS23-0821	23.0	10.80-12.80	13.4	2.7	3.9	9.0	6.0
		WK-SS23-0823	25	12.80-14.80	13.4	2.7	3.9	9.5	6.0
		WK-SS23-0825	27	14.80-16.80	13.4	2.7	3.9	10.0	6.0



WK-AA41

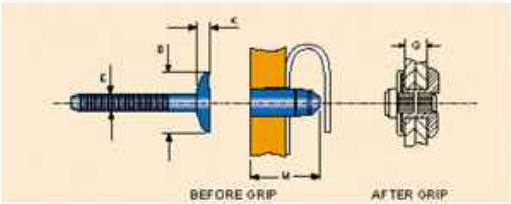


MATERIAL
BODY: Aluminium Alloy
MANDREL: Aluminium Alloy

FINISH
BODY: Natural
MANDREL: Natural

Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
6.4 (1/4")	 6.7 6.9	WK-AA41-0812	13.7	1.50-3.50	13.4	2.7	3.9	5.0	2.7
		WK-AA41-0813	15.0	2.80-4.80	13.4	2.7	3.9	6.0	2.7
		WK-AA41-0814	15.6	3.35-5.35	13.4	2.7	3.9	6.2	2.7
		WK-AA41-0815	17.0	4.80-6.80	13.4	2.7	3.9	6.5	2.7
		WK-AA41-0817	19.0	6.80-8.80	13.4	2.7	3.9	7.0	2.7
		WK-AA41-0818	19.7	7.50-9.50	13.4	2.7	3.9	7.0	2.7
		WK-AA41-0819	21.0	8.80-10.80	13.4	2.7	3.9	7.0	2.7
		WK-AA41-0821	23.0	10.80-12.80	13.4	2.7	3.9	7.0	2.7



WK- BB21

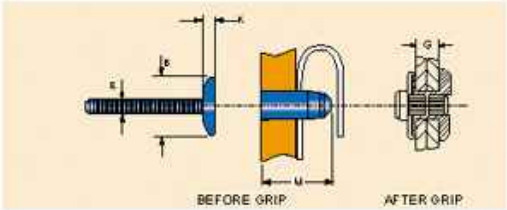


MATERIAL
BODY: 300 Stainless Steel
MANDREL: 300 Stainless Steel

FINISH
BODY: Natural
MANDREL: Natural

Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
6.4 (1/4")	 6.7 6.9	WK-BB21-0812	13.7	1.50-3.50	13.4	2.7	3.9	11.0	10.0
		WK-BB21-0813	15.0	2.80-4.80	13.4	2.7	3.9	11.5	10.0
		WK-BB21-0814	15.6	3.35-5.35	13.4	2.7	3.9	12.0	10.0
		WK-BB21-0815	17.0	4.80-6.80	13.4	2.7	3.9	12.5	10.0
		WK-BB21-0817	19.0	6.80-8.80	13.4	2.7	3.9	13.0	10.0
		WK-BB21-0818	19.7	7.50-9.50	13.4	2.7	3.9	13.5	10.0
		WK-BB21-0819	21.0	8.80-10.80	13.4	2.7	3.9	14	10.0
		WK-BB21-0821	23.0	10.80-12.80	13.4	2.7	3.9	15	10.0



WK-BBP61

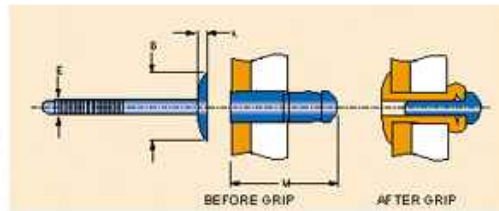

MATERIAL

BODY: 300 Series Stainless Steel

MANDREL: 300 Series Stainless Steel

FINISH


BODY: Natural

MANDREL: Natural

Size	Drill	Part No.	M	Grip range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
3.2 (1/8")	 3.3 3.4	WK-BBP61-0408	8.9	1.0-3.0	6.6	1.1	2.1	1.6	2.0
		WK-BBP61-0411	11.4	3.0-5.0	6.6	1.1	2.1	1.7	2.0
		WK-BBP61-0414	13.6	5.0-7.0	6.6	1.1	2.1	3.2	2.0
4.0 (5/32")	 4.1 4.3	WK-BBP61-0509	10.1	1.0-3.0	8.0	1.5	2.6	5.2	4.0
		WK-BBP61-0512	12.5	3.0-5.0	8.0	1.5	2.6	5.2	4.0
		WK-BBP61-0516	15.1	5.0-7.0	8.0	1.5	2.6	5.2	4.0
4.8 (3/16")	 4.9 5.1	WK-BBP61-0611	12.9	1.5-3.5	9.6	1.5	3.1	5.5	5.0
		WK-BBP61-0614	15.5	3.5-6.0	9.6	1.5	3.1	5.5	5.0
		WK-BBP61-0618	18.5	6.0-8.5	9.6	1.5	3.1	5.5	5.0



WK-SSP-01

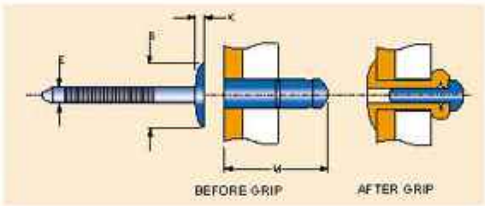


MATERIAL
BODY: Carbon Steel
MANDREL: Carbon Steel

FINISH
BODY: Zinc Plated
MANDREL: Zinc Plated

Size	Drill	Part No.	M	Grip range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
3.2 (1/8")	 3.3 3.4	WK-SSP-01-0408	8.7	1.0-3.0	6.8	1.4	2.1	1.2	1.3
		WK-SSP-01-0411	11.3	3.0-5.0	6.8	1.4	2.1	1.7	1.3
		WK-SSP-01-0414	13.6	5.0-7.0	6.8	1.4	2.1	2.5	1.3
4.0 (5/32")	 4.1 4.3	WK-SSP-01-0509	10.1	1.0-3.0	8.0	1.5	2.6	2.4	2.8
		WK-SSP-01-0512	12.1	3.0-5.0	8.0	1.5	2.6	3.5	2.8
		WK-SSP-01-0516	15.1	5.0-7.0	8.0	1.5	2.6	4.1	2.8
4.8 (3/16")	 4.9 5.1	WK-SSP-01-0611	12.1	1.5-3.5	9.6	1.5	3.1	3.6	3.8
		WK-SSP-01-0614	14.6	3.5-6.0	9.6	1.5	3.1	4.2	3.8
		WK-SSP-01-0618	17.6	6.0-8.5	9.6	1.5	3.1	5.6	3.8
6.0	 6.1 6.3	WK-SSP-01-6010	14.2	1.5-4.0	12.3	2.1	4.0	4.2	5.4
		WK-SSP-01-6013	17.2	3.0-6.0	12.3	2.1	4.0	5.4	5.4
		WK-SSP-01-6016	20.2	6.0-9.0	12.3	2.1	4.0	8.5	5.4
		WK-SSP-01-6019	23.2	9.0-12.0	12.3	2.1	4.0	8.5	5.4



WK-SS1624-Series

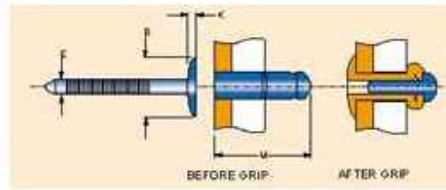

MATERIAL

BODY: Carbon Steel

MANDREL: Carbon Steel

FINISH

BODY: Zinc Plated

MANDREL: Zinc Plated


Size	Drill	Part No.	M	Grip range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
3.2 (1/8")		WK-SS1624-0411	11.4	1.0-4.0	7.6	1.2	2.2	1.3	1.7
		WK-SS1624-0414	14	3.7-6.6	7.6	1.2	2.2	1.3	1.7
4.0 (5/32")		WK-SS1624-0508	9.6	2.0-4.0	8.4	1.6	2.8	1.9	2.3
		WK-SS1624-0514	13.7	1.4-5.0	8.4	1.6	2.8	1.9	2.3
4.8 (3/16")		WK-SS1624-0612	13.5	1.2-4.8	10.1	2.1	3.0	3.6	3.3
		WK-SS1624-0616	15.7	4.0-6.3	10.1	2.1	3.0	4.5	3.4



MULTIGRIP WK-SS01-Series



MATERIAL
BODY: Carbon Steel
MANDREL: Carbon Steel

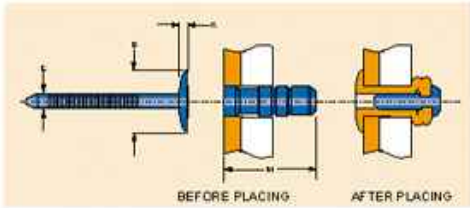

FINISH
BODY: Zinc Plated
MANDREL: Zinc Plated


Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
3.2 (1/8")	Φ  3.3 3.4	WK-SS01-0412	11	1.0-4.5	7.6	1.1	2.2	1.0	1.4
		WK-SS01-0414	14.2	1.0-7.0	7.6	1.1	2.2	1.0	1.4
4.0 (5/32")	Φ  4.1 4.2	WK-SS01-0514	12.2	1.0-5.0	8.4	1.5	2.8	1.5	2.0
		WK-SS01-0516	15.7	2.0-8.0	8.4	1.5	2.8	1.5	2.0
4.8 (3/16")	Φ  4.9 5.0	WK-SS01-0612	12.2	1.5-5.1	10.1	1.6	3.0	2.7	2.9
		WK-SS01-0614	13.7	1.5-6.3	10.1	1.6	3.0	2.7	2.9
		WK-SS01-0618	17.0	1.5-9.5	10.1	1.6	3.0	2.7	2.9
		WK-SS01-0622	20.1	6.4-12.7	10.1	1.6	3.0	2.7	2.9
6.4 (1/4")	Φ  6.6 6.9	WK-SS01-4844	16.8	1.5-7.6	13.1	2.7	4.0	3.1	3.6



WK-CSK SS04



MATERIAL
BODY: Carbon Steel
MANDREL: Carbon Steel

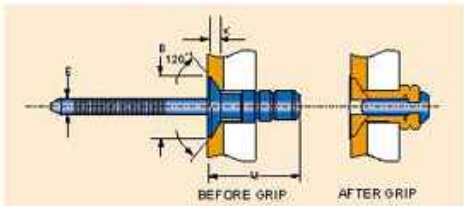

FINISH
BODY: Zinc Plated
MANDREL: Zinc Plated


Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
4.8 (3/16")		WK-SS04-0614	13.7	2.4-6.4	8.8	1.4	3.0	2.7	2.9
		WK-SS04-0618	17.0	2.4-9.5	8.8	1.4	3.0	2.7	2.9
		WK-SS04-0622	20.1	6.4-12.7	8.8	1.4	3.0	2.7	2.9



MULTIGRIP WK-BBS11-Series



MATERIAL
BODY: 300 Series Stainless Steel
MANDREL: 300 Series Stainless Steel

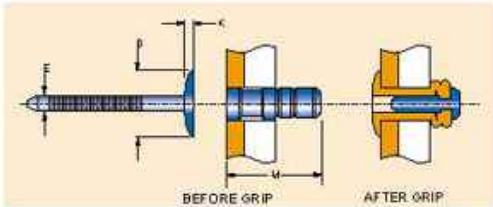

FINISH
BODY: Natural
MANDREL: Natural


Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
3.2 (1/8")	Φ  3.3 3.4	WK-BBS11-00414	14.5	1.0-7.0	7.3	1.1	2.2	1.7	2.2
4.0 (5/32")	Φ  4.1 4.2	WK-BBS11-00516	16.0	2.0-8.0	8.2	1.5	2.8	2.7	3.4
4.8 (3/16")	Φ  4.9 5.0	WK-BBS11-00618	17.0	1.5-9.0	10.0	1.6	3.1	4.5	5.0



WK-DL



MATERIAL
BODY: Aluminium Alloy
MANDREL: Aluminium Alloy

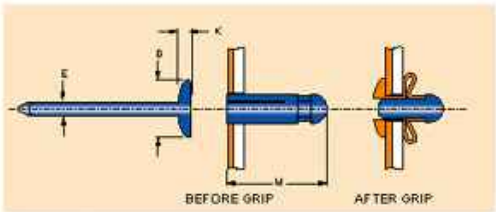

FINISH
BODY: Natural
MANDREL: Natural

Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
4.0 (5/32")		WK-DL-0516	16.0	1.0-3.0	8.2	1.6	2.3	0.6	1.0
		WK-DL-0523	21.2	1.0-7.0	8.2	1.6	2.3	0.6	1.0
4.8 (3/16")		WK-DL-0619	18.1	1.0-4.0	10.1	2.1	2.9	0.8	1.1
		WK-DL-0625	23.3	1.0-9.0	10.1	2.1	2.9	0.8	1.1
		WK-DL-0630	27.1	4.0-12.0	10.1	2.1	2.9	0.8	1.1




WK-SQ-Rivet SSQ-Series



MATERIAL

BODY: Carbon Steel

MANDREL: Carbon Steel

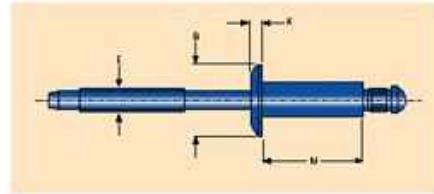

FINISH

BODY: Zinc Plated

MANDREL: Zinc Plated

Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
3.2 (1/8")	 3.3 3.4	WK-SSQ-04-02	7.0	1.60-3.18	6.4	1.1	1.9	1.6	1.4
		WK-SSQ-04-03	8.6	2.39-4.75	6.4	1.1	1.9	1.6	1.4
		WK-SSQ-04-04	10.2	3.20-6.35	6.4	1.1	1.9	1.6	1.4
		WK-SSQ-04-05	11.7	4.78-7.92	6.4	1.1	1.9	1.6	1.4
		WK-SSQ-04-06	13.6	6.38-9.53	6.4	1.1	1.9	1.6	1.4
		WK-SSQ-04-07	15.3	7.95-11.10	6.4	1.1	1.9	1.6	1.4
		WK-SSQ-04-08	17.0	9.55-12.70	6.4	1.1	1.9	1.6	1.4
4.0 (5/32")	 4.1 4.2	WK-SSQ-05-02	7.6	1.57-3.18	7.9	1.3	2.4	2.3	2.0
		WK-SSQ-05-04	10.8	3.20-6.35	7.9	1.3	2.4	2.3	2.0
		WK-SSQ-05-06	14.0	6.38-9.53	7.9	1.3	2.4	2.3	2.0
		WK-SSQ-05-08	17.8	9.55-12.70	7.9	1.3	2.4	2.3	2.0
4.8 (3/16")	 4.9 5.0	WK-SSQ-06-02	8.3	1.57-3.18	9.5	1.5	2.9	3.3	2.9
		WK-SSQ-06-04	11.4	3.20-6.35	9.5	1.5	2.9	3.3	2.9
		WK-SSQ-06-06	14.6	6.38-9.53	9.5	1.5	2.9	3.3	2.9
		WK-SSQ-06-08	17.8	9.55-12.70	9.5	1.5	2.9	3.3	2.9
		WK-SSQ-06-10	21.6	12.73-15.88	9.5	1.5	2.9	3.3	2.9
		WK-SSQ-06-12	24.9	15.90-19.50	9.5	1.5	2.9	3.3	2.9
		WK-SSQ-06-14	28.2	19.08-22.23	9.5	1.5	2.9	3.3	2.9
6.4 (1/4")	 6.5 6.6	WK-SSQ-08-02	9.5	1.57-3.18	12.7	2.0	3.8	5.6	4.7
		WK-SSQ-08-04	12.7	3.20-6.35	12.7	2.0	3.8	5.6	4.7
		WK-SSQ-08-06	15.9	6.38-9.53	12.7	2.0	3.8	5.6	4.7
		WK-SSQ-08-08	19.0	9.55-12.70	12.7	2.0	3.8	5.6	4.7
		WK-SSQ-08-10	22.9	12.73-15.88	12.7	2.0	3.8	5.6	4.7
		WK-SSQ-08-12	26.2	15.90-19.05	12.7	2.0	3.8	5.6	4.7
		WK-SSQ-08-14	29.5	19.08-22.23	12.7	2.0	3.8	5.6	4.7
		WK-SSQ-08-16	32.8	22.20-25.40	12.7	2.0	3.8	5.6	4.7




WK-AQ-Rivet ASQ-Series



MATERIAL

BODY: Aluminium Alloy

MANDREL: Carbon Steel

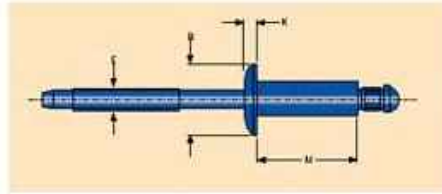

FINISH

BODY: Natural

MANDREL: Zinc Plated

Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
3.2 (1/8")	Φ  3.3 3.4	WK-ASQ-04-02	7.0	1.60-3.18	6.4	1.1	1.9	1.5	1.2
		WK-ASQ-04-03	8.6	2.39-4.75	6.4	1.1	1.9		
		WK-ASQ-04-04	10.2	3.20-6.35	6.4	1.1	1.9		
		WK-ASQ-04-05	11.7	4.78-7.92	6.4	1.1	1.9		
		WK-ASQ-04-06	13.6	6.38-9.53	6.4	1.1	1.9		
		WK-ASQ-04-07	15.3	7.95-11.10	6.4	1.1	1.9		
		WK-ASQ-04-08	17.0	9.55-12.70	6.4	1.1	1.9		
4.0 (5/32")	Φ  4.1 4.2	WK-ASQ-05-02	7.6	1.57-3.18	7.9	1.3	2.4	2.1	1.85
		WK-ASQ-05-04	10.8	3.20-6.35	7.9	1.3	2.4		
		WK-ASQ-05-06	14.0	6.38-9.53	7.9	1.3	2.4		
		WK-ASQ-05-08	17.6	9.55-12.70	7.9	1.3	2.4		
4.8 (3/16")	Φ  4.9 5.0	WK-ASQ-06-02	8.3	1.57-3.18	9.5	1.5	2.9	3.2	2.6
		WK-ASQ-06-04	11.4	3.20-6.35	9.5	1.5	2.9		
		WK-ASQ-06-06	14.6	6.38-9.53	9.5	1.5	2.9		
		WK-ASQ-06-08	17.8	9.55-12.70	9.5	1.5	2.9		
		WK-ASQ-06-10	21.6	12.73-15.88	9.5	1.5	2.9		
		WK-ASQ-06-12	24.9	15.90-19.05	9.5	1.5	2.9		
		WK-ASQ-06-14	28.2	19.08-22.23	9.5	1.5	2.9		
6.4 (1/4")	Φ  6.5 6.6	WK-ASQ-08-02	9.5	1.57-3.18	12.7	2.0	3.8	5.6	4.4
		WK-ASQ-08-04	12.7	3.20-6.35	12.7	2.0	3.8		
		WK-ASQ-08-06	15.9	6.38-9.53	12.7	2.0	3.8		
		WK-ASQ-08-08	19.0	9.55-12.70	12.7	2.0	3.8		
		WK-ASQ-08-10	22.9	12.73-15.88	12.7	2.0	3.8		
		WK-ASQ-08-12	26.2	15.90-19.05	12.7	2.0	3.8		
		WK-ASQ-08-14	29.5	19.08-22.23	12.7	2.0	3.8		
		WK-ASQ-08-16	32.8	22.20-25.40	12.7	2.0	3.8		



Structural Rivet >> SQ, AQ, BQ >> WK-BBQ


WK-BBQ



MATERIAL

BODY: Stainless Steel

MANDREL: Stainless Steel

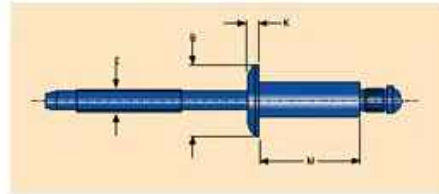

FINISH


BODY: Natural

MANDREL: Natural

Size	Drill	Part No.	M	Grip Range	B	K	E	Shear	Tensile
			max		max	max	max	KN	KN
3.2 (1/8")	 3.3 3.4	WK-BBQ-04-02	7.0	1.60-3.18	6.4	1.1	1.9	1.87	2.36
		WK-BBQ-04-03	8.6	2.39-4.75	6.4	1.1	1.9	1.87	2.36
		WK-BBQ-04-04	10.2	3.20-6.35	6.4	1.1	1.9	1.87	2.36
		WK-BBQ-04-05	11.7	4.78-7.92	6.4	1.1	1.9	1.87	2.36
		WK-BBQ-04-06	13.6	6.38-9.53	6.4	1.1	1.9	1.87	2.36
		WK-BBQ-04-07	15.3	7.95-11.10	6.4	1.1	1.9	1.87	2.36
		WK-BBQ-04-08	17.0	9.55-12.70	6.4	1.1	1.9	1.87	2.36
4.0 (5/32")	 4.1 4.2	WK-BBQ-05-02	7.6	1.57-3.18	7.9	1.3	2.4	2.9	3.65
		WK-BBQ-05-04	10.8	3.20-6.35	7.9	1.3	2.4	2.9	3.65
		WK-BBQ-05-06	14.0	6.38-9.53	7.9	1.3	2.4	2.9	3.65
		WK-BBQ-05-08	17.6	9.55-12.70	7.9	1.3	2.4	2.9	3.65
4.8 (3/16")	 4.9 5.0	WK-BBQ-06-02	8.3	1.57-3.18	9.5	1.5	2.9	4.23	5.34
		WK-BBQ-06-04	11.4	3.20-6.35	9.5	1.5	2.9	4.23	5.34
		WK-BBQ-06-06	14.6	6.38-9.53	9.5	1.5	2.9	4.23	5.34
		WK-BBQ-06-08	17.8	9.55-12.70	9.5	1.5	2.9	4.23	5.34
		WK-BBQ-06-10	21.6	12.73-15.88	9.5	1.5	2.9	4.23	5.34
		WK-BBQ-06-12	24.9	15.90-19.50	9.5	1.5	2.9	4.23	5.34
		WK-BBQ-06-14	28.2	19.08-22.23	9.5	1.5	2.9	4.23	5.34
6.4 (1/4")	 6.5 6.6	WK-BBQ-08-02	9.5	1.57-3.18	12.7	2.0	3.8	7.57	9.35
		WK-BBQ-08-04	12.7	3.20-6.35	12.7	2.0	3.8	7.57	9.35
		WK-BBQ-08-06	15.9	6.38-9.53	12.7	2.0	3.8	7.57	9.35
		WK-BBQ-08-08	19.0	9.55-12.70	12.7	2.0	3.8	7.57	9.35
		WK-BBQ-08-10	22.9	12.73-15.88	12.7	2.0	3.8	7.57	9.35
		WK-BBQ-08-12	26.2	15.90-19.05	12.7	2.0	3.8	7.57	9.35
		WK-BBQ-08-14	29.5	19.08-22.23	12.7	2.0	3.8	7.57	9.35
		WK-BBQ-08-16	32.8	22.20-25.40	12.7	2.0	3.8	7.57	9.35



WK- Monel 400/Stainless Steel Type Large Head



MATERIAL

BODY: Monel 400

MANDREL: Steel

FINISH

BODY: Polished

MANDREL: Zinc Plated

Size	Drill	Part No.	Grip Range		L(Max)		D nom.	K max.	P min.	Shear LBS	Tensile LBS
			Inch	mm	Inch	mm					
3.2mm (1/8")	#30 3.3-3.4	WK-MS41	0.020-0.062	0.5-1.6	0.212	5.4	0.250" 6.4	0.040" 1.02	1.06" 27	269 1200N	382 1700N
		WK-MS42	0.063-0.125	1.6-3.2	0.275	7.0					
		WK-MS43	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-MS44	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-MS45	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-MS46	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-MS48	0.376-0.500	9.5-12.7	0.650	16.5					
4.0mm (5/32")	#20 4.1-4.2	WK-MS52	0.020-0.125	0.5-3.2	0.300	7.6	0.312" 7.9	0.050" 1.27	1.06" 27	763 3400N	875 3900N
		WK-MS53	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-MS54	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-MS56	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-MS58	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-MS510	0.501-0.625	12.7-15.9	0.800	20.3					
		WK-MS512	0.626-0.750	15.9-19.1	0.925	23.5					
		WK-MS514	0.751-0.875	19.1-22.2	1.050	26.7					
4.8 mm (3/16")	#11 4.9-5.0	WK-MS62	0.020-0.125	0.5-3.2	0.325	8.3	0.375" 9.5	0.060" 1.52	1.06" 27	830 3700N	1167 5200N
		WK-MS63	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-MS64	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-MS66	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-MS68	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-MS610	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-MS612	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-MS614	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-MS616	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-MS618	1.001-1.125	25.4-28.6	1.325	33.7					
		WK-MS620	1.126-1.250	28.6-31.8	1.450	36.8					
		WK-MS622	1.251-1.375	31.8-34.9	1.575	40.0					



WK-Monel 400



MATERIAL

BODY: Monel 400

MANDREL: 300 Series Stainless Steel



FINISH

BODY: Polished



MANDREL: Polished

Size	Drill	Part No.	Grip Range		L(Max)		D	K	P	Shear	Tensile
			Inch	mm	Inch	mm					
3.2mm (1/8")	#30 3.3-3.4	WK-MB41	0.020-0.062	0.5-1.6	0.212	5.4	0.250" 6.4	0.040" 1.02	1.06" 27	269 1200N	382 1700N
		WK-MB42	0.063-0.125	1.6-3.2	0.275	7.0					
		WK-MB43	0.126-0.187	3.2-4.8	0.337	8.6					
		WK-MB44	0.188-0.250	4.8-6.4	0.400	10.2					
		WK-MB45	0.251-0.312	6.4-7.9	0.462	11.7					
		WK-MB46	0.313-0.375	7.9-9.5	0.525	13.3					
		WK-MB48	0.376-0.500	9.5-12.7	0.650	16.5					
4.0mm (5/32")	#20 4.1-4.2	WK-MB52	0.020-0.125	0.5-3.2	0.300	7.6	0.312" 7.9	0.050" 1.27	1.06" 27	763 3400N	875 3900N
		WK-MB53	0.126-0.187	3.2-4.8	0.362	9.2					
		WK-MB54	0.188-0.250	4.8-6.4	0.425	10.8					
		WK-MB56	0.251-0.375	6.4-9.5	0.550	14.0					
		WK-MB58	0.376-0.500	9.5-12.7	0.675	17.1					
		WK-MB510	0.501-0.625	12.7-15.9	0.800	20.3					
		WK-MB512	0.626-0.750	15.9-19.1	0.925	23.5					
		WK-MB514	0.751-0.875	19.1-22.2	1.050	26.7					
4.8mm (3/16")	#11 4.9-5.0	WK-MB62	0.020-0.125	0.5-3.2	0.325	8.3	0.375" 9.5	0.060" 1.52	1.06" 27	830 3700N	1167 5200N
		WK-MB63	0.126-0.187	3.2-4.8	0.387	9.8					
		WK-MB64	0.188-0.250	4.8-6.4	0.450	11.4					
		WK-MB66	0.251-0.375	6.4-9.5	0.575	14.6					
		WK-MB68	0.376-0.500	9.5-12.7	0.700	17.8					
		WK-MB610	0.501-0.625	12.7-15.9	0.825	21.0					
		WK-MB612	0.626-0.750	15.9-19.1	0.950	24.1					
		WK-MB614	0.751-0.875	19.1-22.2	1.075	27.3					
		WK-MB616	0.876-1.000	22.2-25.4	1.200	30.5					
		WK-MB618	1.001-1.125	25.4-28.6	1.325	33.7					
		WK-MB620	1.126-1.250	28.6-31.8	1.450	36.8					
		WK-MB622	1.251-1.375	31.8-34.9	1.575	40.0					



RIVET NUT >> Flat Head WK-PT



Flat Head WK-PT

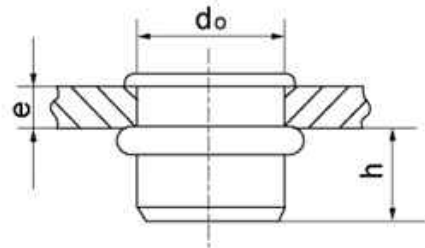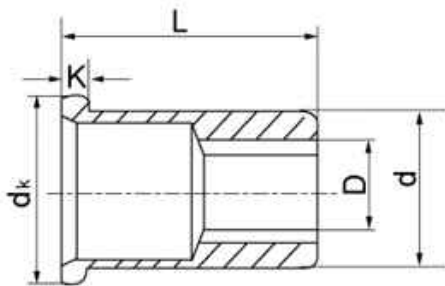

SIZE		D	Grip Range e	h Ref.	d0 +0.15 -0.05	d +0.03 -0.20	dk ±0.30	K ±0.20	L ±0.30
WK-PT-M3	M3	M3	0.5-2.0	4.5	5	5	7	0.8	8.8
WK-PT-M4	M4	M4	0.5-2.0	6.5	6	6	9	0.8	10.8
WK-PT-M5	M5	M5	0.5-2.5	8.0	7	7	10	1.0	13.0
WK-PT-M6	M6	M6	0.5-3.0	9.0	9	9	13	1.5	15.0
WK-PT-M8	M8	M8	0.5-3.5	11.5	11	11	15	1.5	18.
WK-PT-M10	M10	M10	0.5-3.5	12.5	13	13	17	1.8	20.3
WK-PT-M12	M12	M12	0.5-3.5	15.5	15	15	19	1.8	24.3



Flat Head WK-PTR

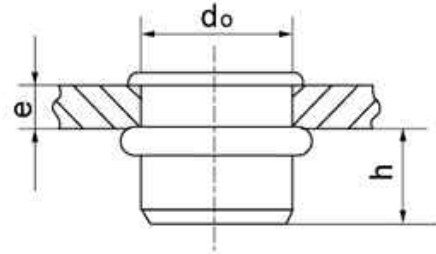
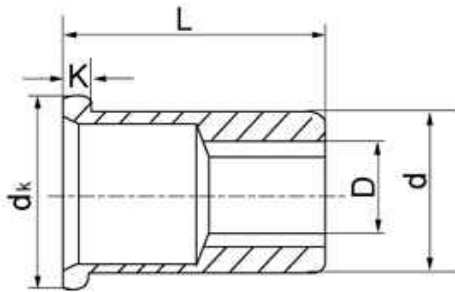


SIZE		D	Grip Range e	h Ref.	d0 +0.15 -0.05	d +0.03 -0.20	dk ±0.30	K ±0.20	L ±0.30
WK-PTR-M3	M3R	M3	0.5-2.0	4.5	5	5	7	0.8	8.8
WK-PTR-M4	M4R	M4	0.5-2.0	6.5	6	6	9	0.8	10.8
WK-PTR-M5	M5R	M5	0.5-2.5	8.0	7	7	10	1.0	13.0
WK-PTR-M6	M6R	M6	0.5-3.0	9.0	9	9	13	1.5	15.0
WK-PTR-M8	M8R	M8	0.5-3.5	11.5	11	11	15	1.5	18.
WK-PTR-M10	M10R	M10	0.5-3.5	12.5	13	13	17	1.8	20.3
WK-PTR-M12	M12R	M12	0.5-3.5	15.5	15	15	19	1.8	24.3



RIVET NUT >> Thin CSK Head WK-XCT



Thin CSK Head WK-XCT

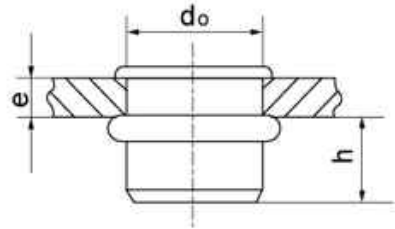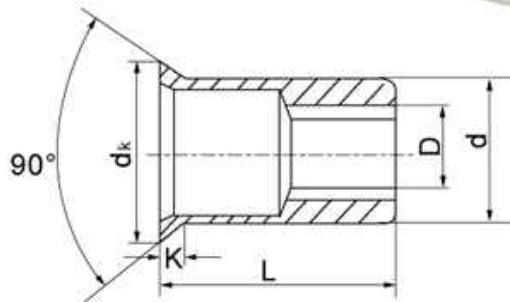

SIZE	D	Grip Range e	h Ref.	d ₀ +0.15 -0.05	d +0.03 -0.20	d _k ±0.30	K ±0.20	L ±0.30
WK-XCT-M3	M3	0.5-2.0	5.0	5	5	5.50	0.35	8.5
WK-XCT-M4	M4	0.5-2.0	6.5	6	6	6.75	0.50	10.0
WK-XCT-M5	M5	0.5-2.5	8.0	7	7	8.00	0.60	12.0
WK-XCT-M6	M6	0.5-3.0	9.5	9	9	10.00	0.60	14.5
WK-XCT-M8	M8	0.5-3.5	10.5	11	11	12.30	0.60	16.5
WK XCT-M10	M10	0.5-3.5	13.0	13	13	14.50	0.85	19.0
WK XCT-M12	M12	0.5-3.5	16.0	15	15	16.50	0.85	22.5



Thin CSK Head WK-XCT-R

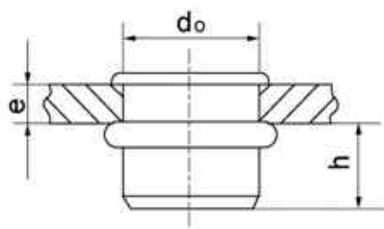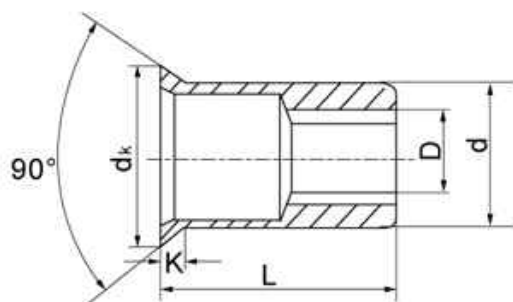


SIZE	D	Grip Range e	h Ref.	d0 +0.15 -0.05	d +0.03 -0.20	dk ±0.30	K ±0.20	L ±0.30
WK-XCT-R-M3	M3	0.5-2.0	5.0	5	5	5.50	0.35	8.5
WK-XCT-R-M4	M4	0.5-2.0	6.5	6	6	6.75	0.50	10.0
WK-XCT-R-M5	M5	0.5-2.5	8.0	7	7	8.00	0.60	12.0
WK-XCT-R-M6	M6	0.5-3.0	9.5	9	9	10.00	0.60	14.5
WK-XCT-R-M8	M8	0.5-3.5	10.5	11	11	12.30	0.60	16.5
WK-XCT-R-M10	M10	0.5-3.5	13.0	13	13	14.50	0.85	19.0
WK-XCT-R-M12	M12	0.5-3.5	16.0	15	15	16.50	0.85	22.5



RIVET NUT->> CSK Head WK-CT

CSK Head WK-CT

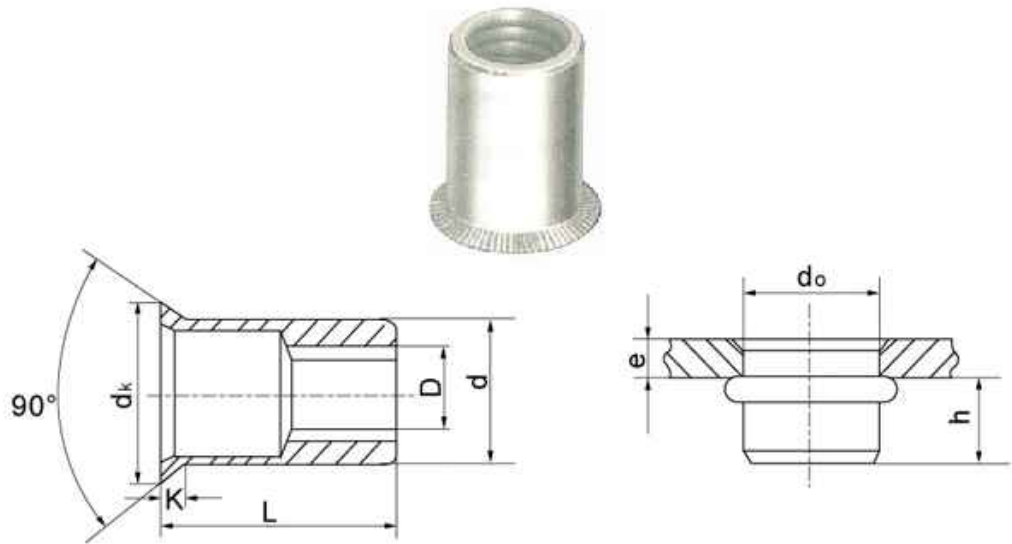


SIZE	D	Grip Range e	h Ref.	d0 +0.15 -0.05	d +0.03 -0.20	dk ±0.30	K ±0.20	L ±0.30
WK-CT-M3	M3	1.6-3.5	4.5	5	5	7	0.8	8.8
WK-CT-M4	M4	1.6-3.5	6.0	6	6	9	0.8	10.8
WK-CT-M5	M5	1.6-4.0	8.5	7	7	10	1.0	13.0
WK-CT-M6	M6	1.6-4.5	9.0	9	9	13	1.5	15.0
WK-CT-M8	M8	1.6-5.0	10.0	11	11	15	1.5	18.0
WK-CT-M10	M10	1.6-5.0	11.5	13	13	17	1.8	20.3
WK-CT-M12	M12	1.6-5.0	14.5	15	15	19	1.8	24.3



RIVET NUT >> CSK Head WK-CTR

CSK Head WK-CTR

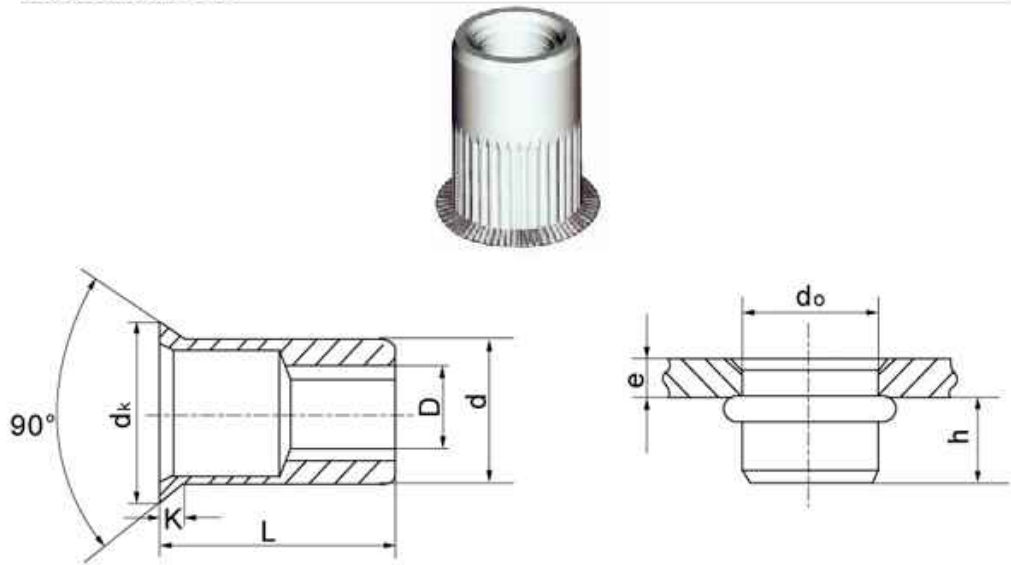


SIZE	D	Grip Range e	h Ref.	d ₀ +0.15 -0.05	d +0.03 -0.20	d _k ±0.30	K ±0.20	L ±0.30
WK-CTR-M3	M3	1.6-3.5	4.5	5	5	7	0.8	8.8
WK-CTR-M4	M4	1.6-3.5	6.0	6	6	9	0.8	10.8
WK-CTR-M5	M5	1.6-4.0	8.5	7	7	10	1.0	13.0
WK-CTR-M6	M6	1.6-4.5	9.0	9	9	13	1.5	15.0
WK-CTR-M8	M8	1.6-5.0	10.0	11	11	15	1.5	18.0
WK-CTR-M10	M10	1.6-5.0	11.5	13	13	17	1.8	20.3
WK-CTR-M12	M12	1.6-5.0	14.5	15	15	19	1.8	24.3



RIVET NUT >> Thin Head Half Hex WK-XBL


Thin Head Half Hex WK-XBL

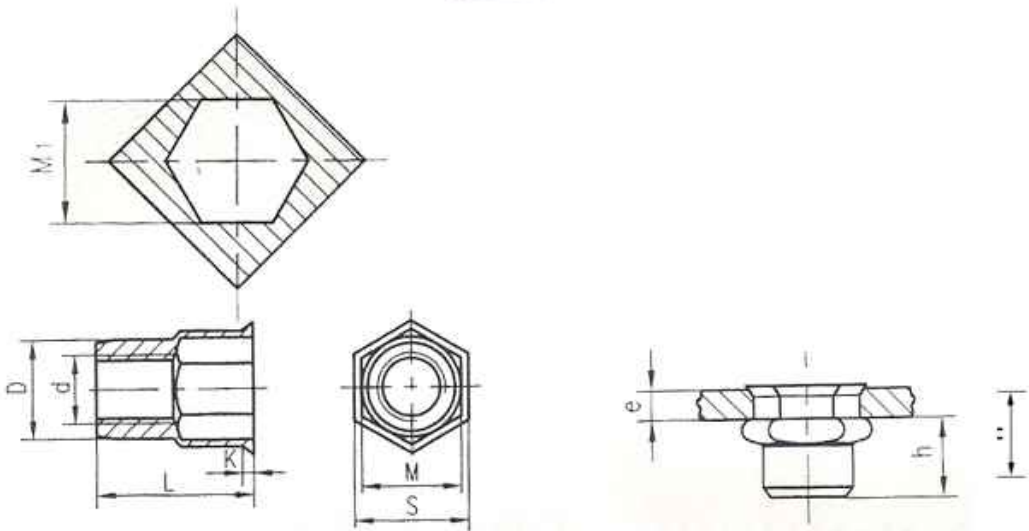

SIZE	D	Grip Range e	h Ref.	d0 +0.15 -0.05	d +0.03 -0.20	dk ±0.30	K ±0.20	L ±0.30
WK-XBL-M4	M4	0.5-2.0	6.5	6	6	6.75	0.5	10.0
WK-XBL-M5	M5	0.5-2.5	8.0	7	7	8.0	0.6	12.0
WK-XBL-M6	M6	0.5-3.0	9.5	9	9	10.0	.6	14.5
WK-XBL-M8	M8	0.5-3.5	10.0	11	11	12.3	0.6	16.5
WK-XBL-M10	M10	0.5-3.5	12.5	13	13	14.5	0.85	19.0



Flat Head Hex WK-PBL

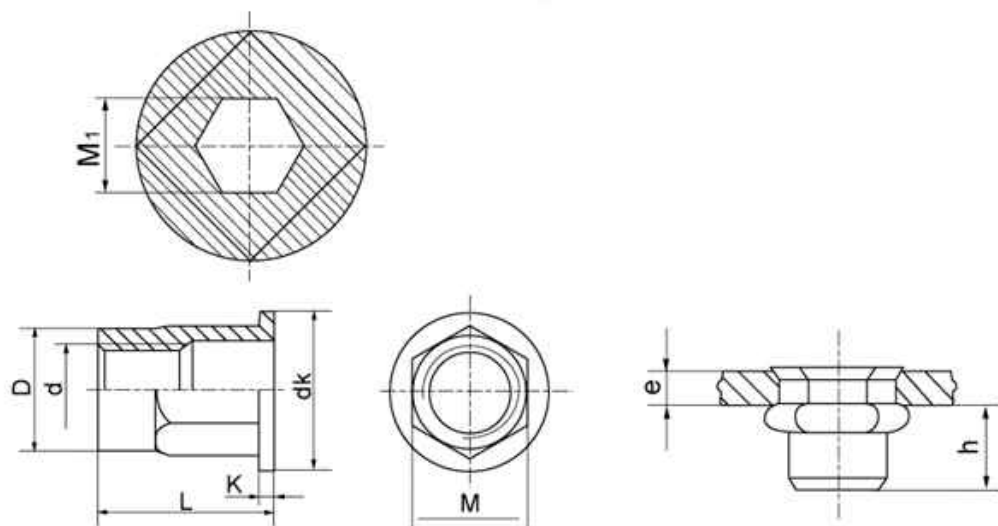

SIZE	D	Grip Range e	h Ref.	d0 +0.15 -0.05	d +0.03 -0.20	dk ±0.30	K ±0.20	L ±0.30
WK-PBL-M4	M4	0.5-2.0	6.5	6	6	9	0.8	10.8
WK-PBL-M5	M5	0.5-3.0	8.0	7	7	10	1.0	13.0
WK-PBL-M6	M6	0.5-3.5	8.5	9	9	13	1.5	15.8
WK-PBL-M8	M8	0.5-3.5	10.5	11	11	15	1.5	18.0
WK-PBL-M10	M10	0.5-3.5	12.0	13	13	17	1.8	20.3



RIVET GUN >> WKF-2

RIVET GUN WKF-2



Riveting : Φ 2.4-4.8mm
Capable of all materials
Pull force : 1100kg
Stroke : 20mm
Pressure required : Min.0.5Mpa
Weight : 1.6kg



RIVET GUN >> WKF-3

RIVET GUN WKF-3



Riveting : $\Phi 3.2-6.4\text{mm}$
Capable of all materials, mainly for S-BOLT
Pull force : 1200kg
Stroke : 26mm
Pressure required : Min. 0.5Mpa
Weight : 1.9kg



RIVET GUN >> WKF-4

RIVET GUN WKF-4



Riveting : Φ 3.2-6.4mm
Capable of all materials, mainly for hem-fix
Pull force : 1600kg
Stroke : 20mm
Pressure required : Min. 0.5Mpa
Weight : 1.9kg



RIVET GUN >> WK-1

RIVET GUN WK-1



Riveting: M4-M12 for steel and aluminium
Riveting: M4-M8 for stainless steel
Pressure required : Min. 0.5Mpa
Weight : 2.3kg